



# STOP LAMP

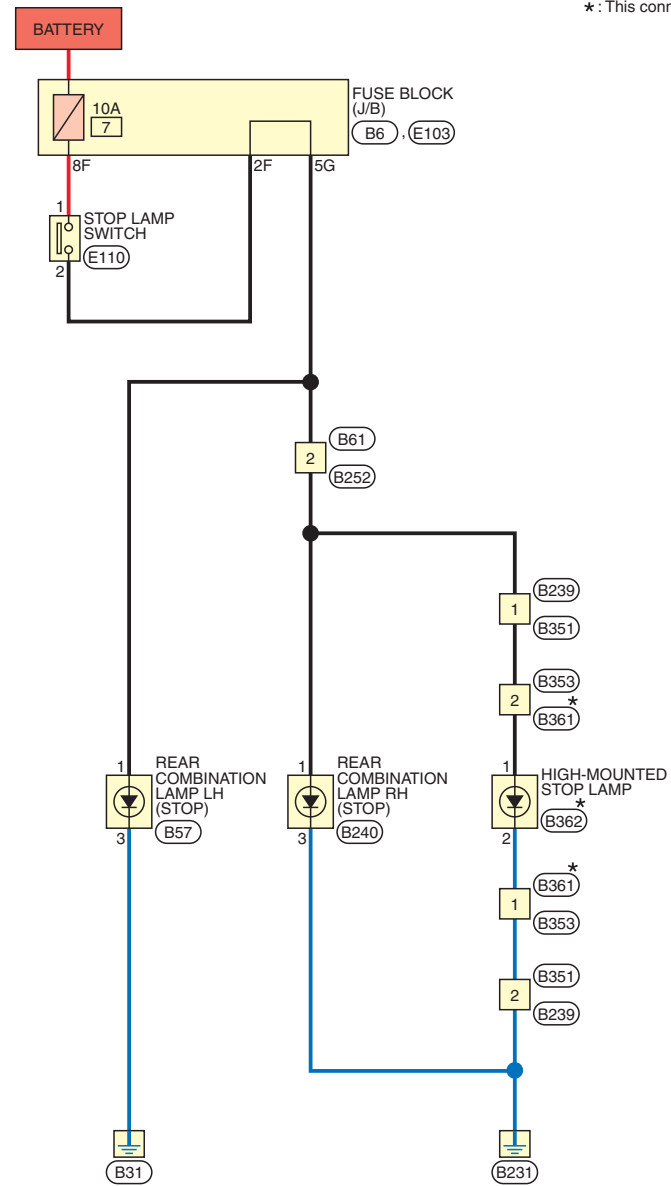


## STOP LAMP

Connector No.	B6
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS12FBR-CS




Terminal No.	Color of Wire	Signal Name [Specification]
5G	W	—

Connector No.	B57
Connector Name	REAR COMBINATION LAMP LH
Connector Type	NS06MW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
1	W	—
3	B	—

Connector No.	B61
Connector Name	WIRE TO WIRE
Connector Type	TH12FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
2	W	—

Connector No.	B239
Connector Name	WIRE TO WIRE
Connector Type	TH04FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
1	Y	—
2	B	—

Connector No.	B240
Connector Name	REAR COMBINATION LAMP RH
Connector Type	NS06MW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
1	Y	—
3	B	—

Connector No.	B252
Connector Name	WIRE TO WIRE
Connector Type	TH12MW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
2	Y	—

Connector No.	B351
Connector Name	WIRE TO WIRE
Connector Type	TH04MW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
1	LG	—
2	B	—

Connector No.	B353
Connector Name	WIRE TO WIRE
Connector Type	A02FW



Terminal No.	Color of Wire	Signal Name [Specification]
1	B	—
2	LG	—

STOP LAMP

Connector No.	B361
Connector Name	WIRE TO WIRE
Connector Type	A02MW




Terminal No.	Color of Wire	Signal Name [Specification]
1	B	-
2	G	-

Connector No.	B362
Connector Name	HIGH-MOUNTED STOP LAMP
Connector Type	RK02FGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	G	-
2	B	-

Connector No.	E103
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS16FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
2F	W	-
8F	L	-

Connector No.	E110
Connector Name	STOP LAMP SWITCH
Connector Type	M04FW-LC



Terminal No.	Color of Wire	Signal Name [Specification]
1	L	-
2	W	-