



ACCESSORY POWER SUPPLY FUSE No. 19

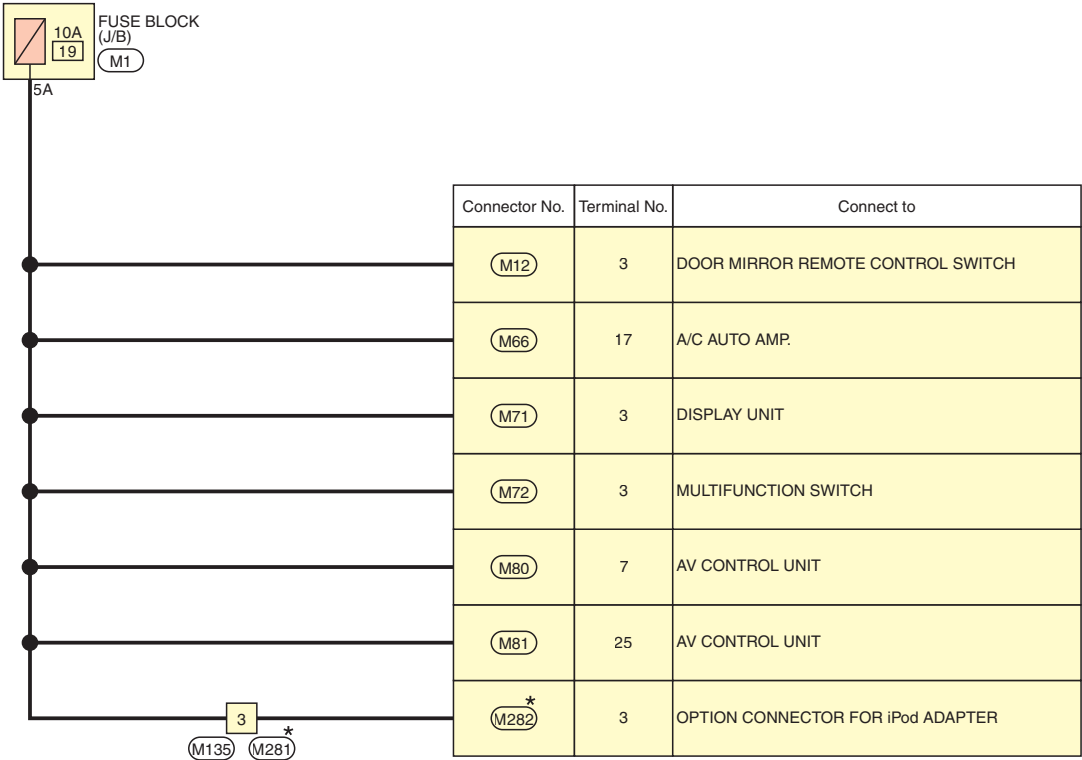

★ : This connector is not shown in "Harness Layout".


## ACCESSORY POWER SUPPLY FUSE No. 19

Connector No.	M1
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS06FW-M2




Terminal No.	Color of Wire	Signal Name [Specification]
5A	SB	-

Connector No.	M12
Connector Name	DOOR MIRROR REMOTE CONTROL SWITCH
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
3	SB	-

Connector No.	M66
Connector Name	A/C AUTO AMP.
Connector Type	SAB40FW




Terminal No.	Color of Wire	Signal Name [Specification]
17	SB	ACC POWER SUPPLY

Connector No.	M71
Connector Name	DISPLAY UNIT
Connector Type	TH24FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
3	P	ACC

Connector No.	M72
Connector Name	MULTIFUNCTION SWITCH
Connector Type	TH16FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
3	V	ACC

Connector No.	M80
Connector Name	AV CONTROL UNIT
Connector Type	TH18FW-CS2




Terminal No.	Color of Wire	Signal Name [Specification]
7	V	ACC

Connector No.	M81
Connector Name	AV CONTROL UNIT
Connector Type	TH40FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
25	V	ACC


Connector No.	M135
Connector Name	WIRE TO WIRE
Connector Type	TH12FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
3	L	-


ACCESSORY POWER SUPPLY FUSE No. 19

Connector No.	M281
Connector Name	WIRE TO WIRE
Connector Type	TH12MW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
3	V	-

Connector No.	M282
Connector Name	OPTION CONNECTOR FOR iPod ADAPTER
Connector Type	TH24FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
3	V	ACC