




# ILLUMINATION

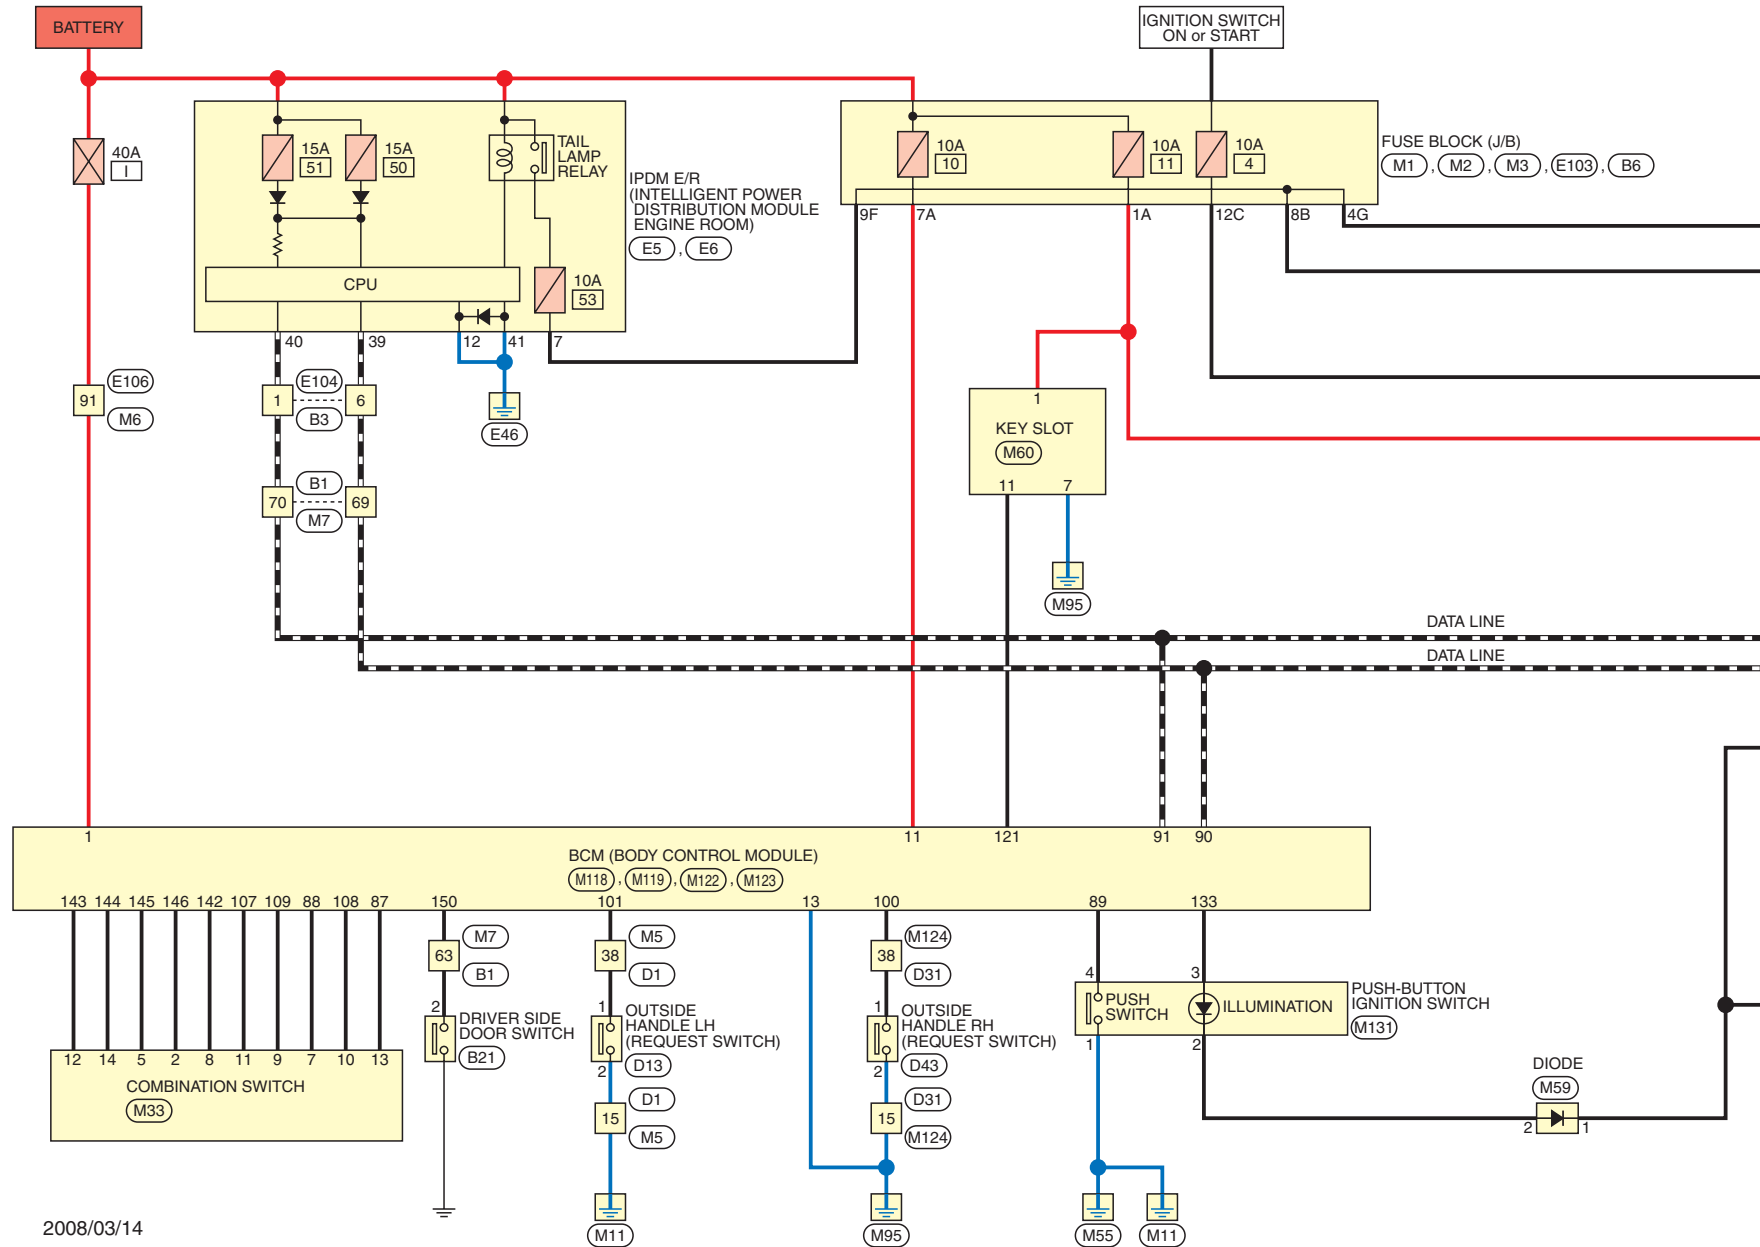

HS : With heated seat

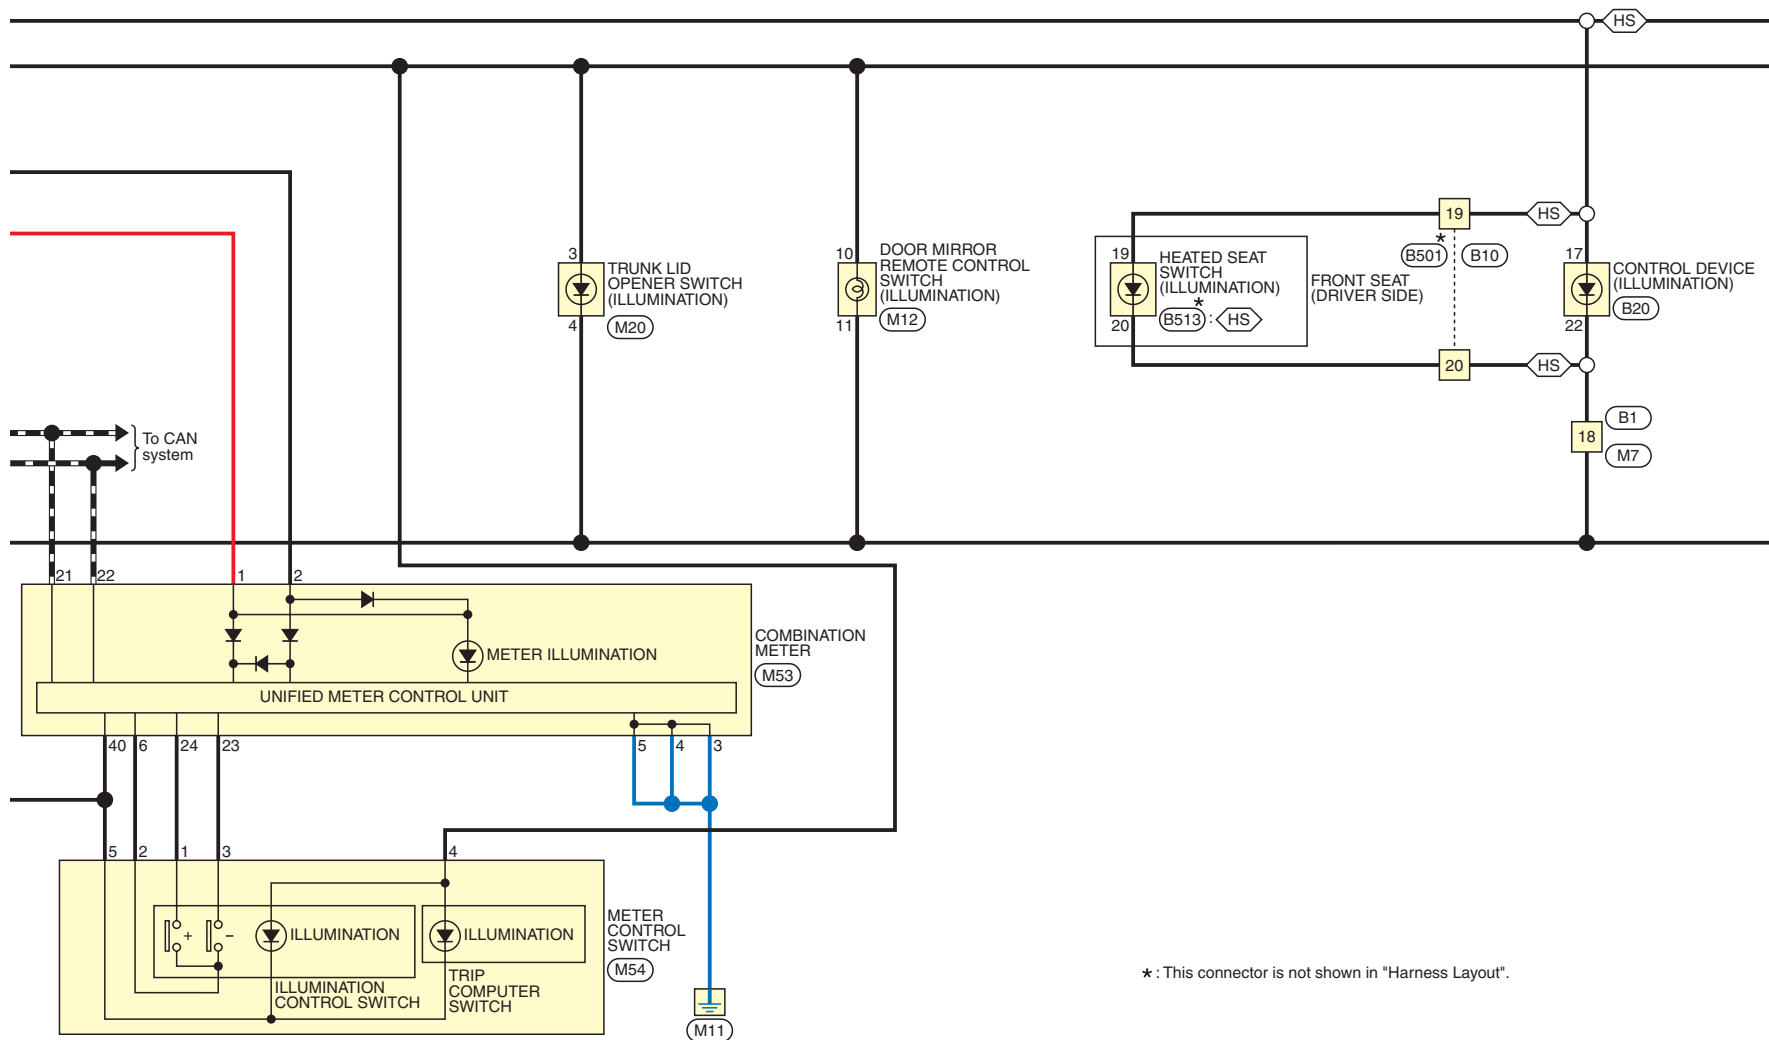


HS : With heated seat

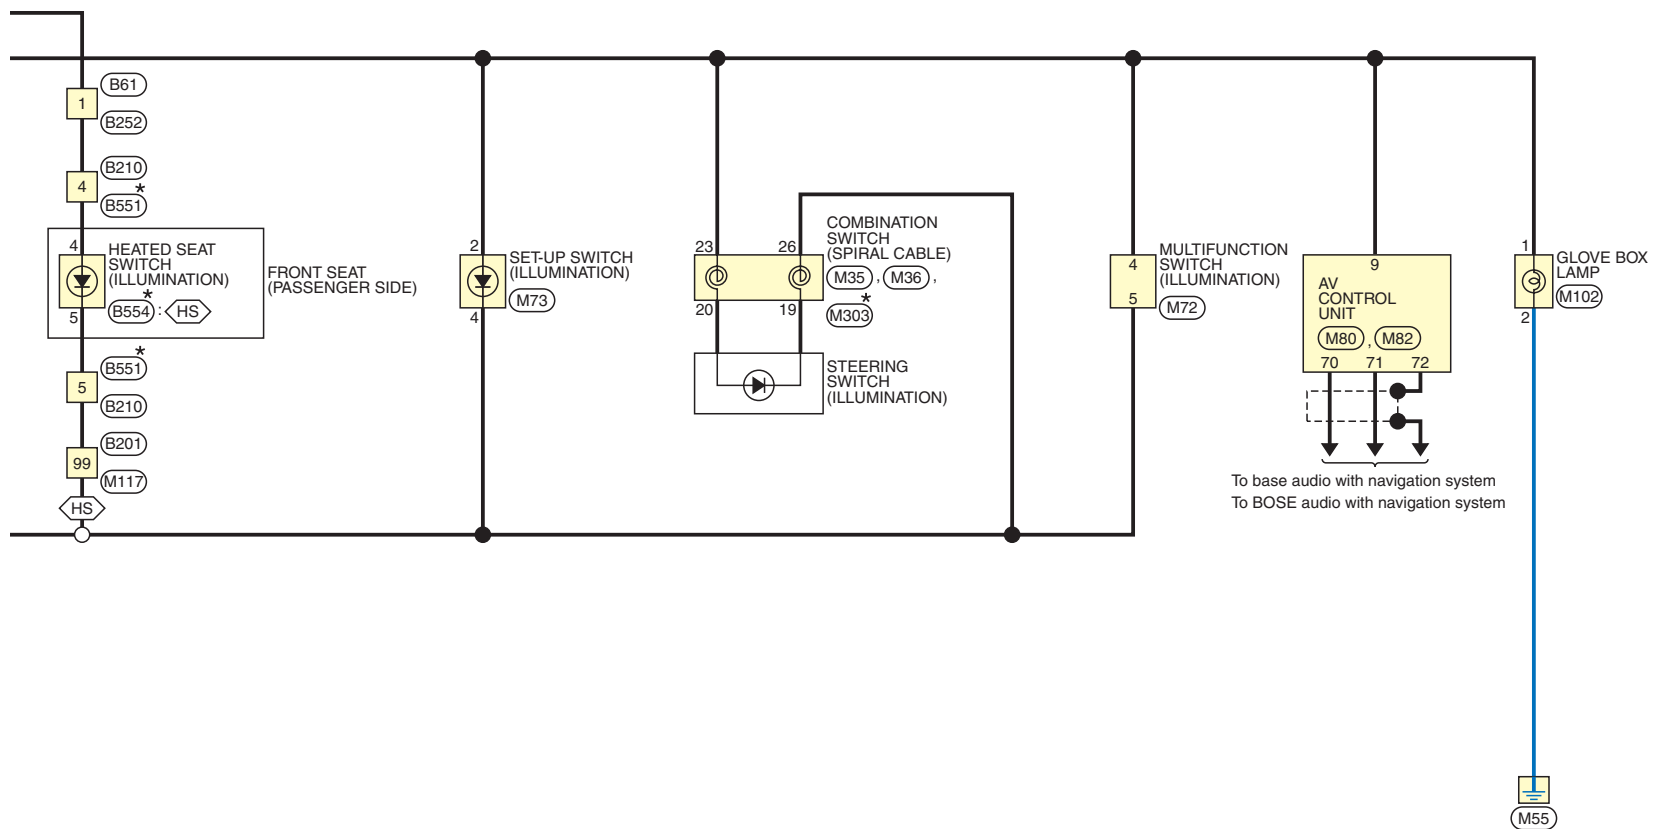

\* : This connector is not shown in "Harness Layout".


## ILLUMINATION

Connector No.	B1
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
18	BR	—
63	LG	—
69	P	—
70	L	—

Connector No.	B3
Connector Name	WIRE TO WIRE
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
1	L	—
6	P	—

Connector No.	B6
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS12FBR-CS




Terminal No.	Color of Wire	Signal Name [Specification]
4G	R	—

Connector No.	B10
Connector Name	WIRE TO WIRE
Connector Type	NS06FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
19	P	—
20	BR	—

Connector No.	B20
Connector Name	CONTROL DEVICE
Connector Type	TH24FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
17	R	ILLUMINATION
22	BR	ILLUMINATION GND

Connector No.	B21
Connector Name	DRIVER SIDE DOOR SWITCH
Connector Type	A03FW




Terminal No.	Color of Wire	Signal Name [Specification]
2	LG	—

Connector No.	B61
Connector Name	WIRE TO WIRE
Connector Type	TH12FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
1	R	—


Connector No.	B201
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
99	BR	—


## ILLUMINATION

Connector No.	B210
Connector Name	WIRE TO WIRE
Connector Type	NS06FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
4	W	-
5	BR	-

Connector No.	B252
Connector Name	WIRE TO WIRE
Connector Type	TH12MW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-

Connector No.	B501
Connector Name	WIRE TO WIRE
Connector Type	NS06MW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
19	W/R	-
20	W/B	-

Connector No.	B513
Connector Name	HEATED SEAT SWITCH
Connector Type	NS06FBR-CS




Terminal No.	Color of Wire	Signal Name [Specification]
19	W/R	-
20	W/B	-

Connector No.	B551
Connector Name	WIRE TO WIRE
Connector Type	NS06MW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
4	G	-
5	L	-

Connector No.	B554
Connector Name	HEATED SEAT SWITCH
Connector Type	TK10FW



Terminal No.	Color of Wire	Signal Name [Specification]
4	G	-
5	L	-

Connector No.	D1
Connector Name	WIRE TO WIRE
Connector Type	TH40FW-CS15



Terminal No.	Color of Wire	Signal Name [Specification]
15	B	-
38	W	-


Connector No.	D13
Connector Name	OUTSIDE HANDLE LH (REQUEST SWITCH)
Connector Type	RK02MGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-
2	B	-

## ILLUMINATION

Connector No.	D31
Connector Name	WIRE TO WIRE
Connector Type	TH40FW-CS15

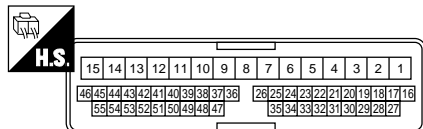


Terminal No.	Color of Wire	Signal Name [Specification]
15	B	-
38	W	-

Connector No.	D43
Connector Name	OUTSIDE HANDLE RH (REQUEST SWITCH)
Connector Type	RK02MGY




Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-
2	B	-

Connector No.	E5
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH20FW-CS12-M4-1V

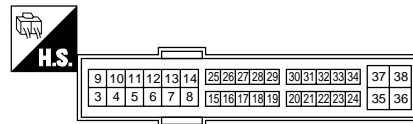


Terminal No.	Color of Wire	Signal Name [Specification]
7	R	-
12	B/W	-

Connector No.	E6
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH08FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
39	P	-
40	L	-
41	B/Y	-

Connector No.	E103
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS16FW-CS

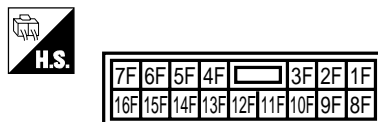


Terminal No.	Color of Wire	Signal Name [Specification]
9F	R	-

Connector No.	E104
Connector Name	WIRE TO WIRE
Connector Type	NS12MW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
1	L	-
6	P	-

Connector No.	E106
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
91	GR	-


Connector No.	M1
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS06FW-M2



Terminal No.	Color of Wire	Signal Name [Specification]
1A	V	-
7A	R	-


## ILLUMINATION

Connector No.	M2
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS10FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
8B	R	—

Connector No.	M3
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
12C	W	—

Connector No.	M5
Connector Name	WIRE TO WIRE
Connector Type	TH40MW-CS15




Terminal No.	Color of Wire	Signal Name [Specification]
15	B	—
38	V	—

Connector No.	M6
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
91	GR	—

Connector No.	M7
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
18	SB	—
63	GR	—
69	P	—
70	L	—

Connector No.	M12
Connector Name	DOOR MIRROR REMOTE CONTROL SWITCH
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
10	R	—
11	V	—

Connector No.	M20
Connector Name	TRUNK LID OPENER SWITCH
Connector Type	TK04FW



Terminal No.	Color of Wire	Signal Name [Specification]
3	R	—
4	V	—

Connector No.	M33
Connector Name	COMBINATION SWITCH
Connector Type	TH16FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
2	SB	OUTPUT 4
5	L	OUTPUT 3
7	V	INPUT 3
8	O	OUTPUT 5
9	Y	INPUT 2
10	R	INPUT 4
11	LG	INPUT 1
12	P	OUTPUT 1
13	BR	INPUT 5
14	G	OUTPUT 2


## ILLUMINATION

Connector No.	M35
Connector Name	COMBINATION SWITCH (SPIRAL CABLE)
Connector Type	TK06FY-EX-1V




Terminal No.	Color of Wire	Signal Name [Specification]
23	P	-

Connector No.	M36
Connector Name	COMBINATION SWITCH (SPIRAL CABLE)
Connector Type	TK08FGY-1V




Terminal No.	Color of Wire	Signal Name [Specification]
26	Y	-

Connector No.	M53
Connector Name	COMBINATION METER
Connector Type	SAB40FW



Terminal No.	Color of Wire	Signal Name [Specification]
1	V	BATTERY POWER SUPPLY
2	W	IGNITION POWER SUPPLY
3	B	GROUND
4	B	ILL GND
5	B	GROUND
6	W	METER CONTROL SWITCH GROUND
21	L	CAN-H
22	P	CAN-L
23	LG	ILLUMINATION CONTROL SWITCH SIGNAL (-)
24	BR	ILLUMINATION CONTROL SWITCH SIGNAL (+)
40	V	ILLUMINATION CONTROL

Connector No.	M54
Connector Name	METER CONTROL SWITCH
Connector Type	TH12FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
1	BR	-
2	W	-
3	LG	-
4	R	-
5	V	-

Connector No.	M59
Connector Name	DIODE
Connector Type	24335_C9900




Terminal No.	Color of Wire	Signal Name [Specification]
1	V	-
2	P	-

Connector No.	M60
Connector Name	KEY SLOT
Connector Type	TH12FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
1	G	BAT
7	B	GND
11	R	KEY SWITCH SIGNAL

Connector No.	M72
Connector Name	MULTIFUNCTION SWITCH
Connector Type	TH16FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
4	P	ILL
5	P	ILL CONT

Connector No.	M73
Connector Name	SET-UP SWITCH
Connector Type	TK24FW-1V




Terminal No.	Color of Wire	Signal Name [Specification]
2	R	ILL+
4	V	ILL GND




## ILLUMINATION

Connector No.	M80
Connector Name	AV CONTROL UNIT
Connector Type	TH18FW-CS2



Terminal No.	Color of Wire	Signal Name [Specification]
9	R	ILLUMINATION

Connector No.	M82
Connector Name	AV CONTROL UNIT
Connector Type	TH12FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
70	BR	COMM (CONT->DISP)
71	Y	COMM (DISP->CONT)
72	SHIELD	SHIELD

Connector No.	M102
Connector Name	GLOVE BOX LAMP
Connector Type	A02FW



Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-
2	B	-

Connector No.	M117
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
99	V	-

Connector No.	M118
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	M03FB-LC




Terminal No.	Color of Wire	Signal Name [Specification]
1	GR	BAT (F/L)

Connector No.	M119
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	NS16FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
11	R	BAT (FUSE)
13	B	GND

Connector No.	M122
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FB-NH



Terminal No.	Color of Wire	Signal Name [Specification]
87	BR	COMBI SW INPUT 5
88	V	COMBI SW INPUT 3
89	BR	PUSH SW
90	P	CAN-L
91	L	CAN-H
100	W	PASSENGER DOOR REQUEST SW
101	V	DRIVER DOOR REQUEST SW
107	LG	COMBI SW INPUT 1
108	R	COMBI SW INPUT 4
109	Y	COMBI SW INPUT 2


Connector No.	M123
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FG-NH



Terminal No.	Color of Wire	Signal Name [Specification]
121	R	KEY SLOT SW
133	W	PUSH-BUTTON IGNITION SW ILL POWER
142	O	COMBI SW OUTPUT 5
143	P	COMBI SW OUTPUT 1
144	G	COMBI SW OUTPUT 2
145	L	COMBI SW OUTPUT 3
146	SB	COMBI SW OUTPUT 4
150	GR	DRIVER DOOR SW

ILLUMINATION

Connector No.	M124
Connector Name	WIRE TO WIRE
Connector Type	TH40MW-CS15

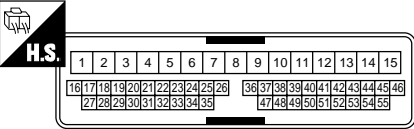


Terminal No.	Color of Wire	Signal Name [Specification]
15	B	-
38	W	-

Connector No.	M131
Connector Name	PUSH-BUTTON IGNITION SWITCH
Connector Type	TK08FBR



Terminal No.	Color of Wire	Signal Name [Specification]
1	B	-
2	P	-
3	W	-
4	BR	-

Connector No.	M303
Connector Name	COMBINATION SWITCH (SPIRAL CABLE)
Connector Type	TK08FGY



Terminal No.	Color of Wire	Signal Name [Specification]
19	-	-
20	-	-