




PDS (POWER DISTRIBUTION SYSTEM)

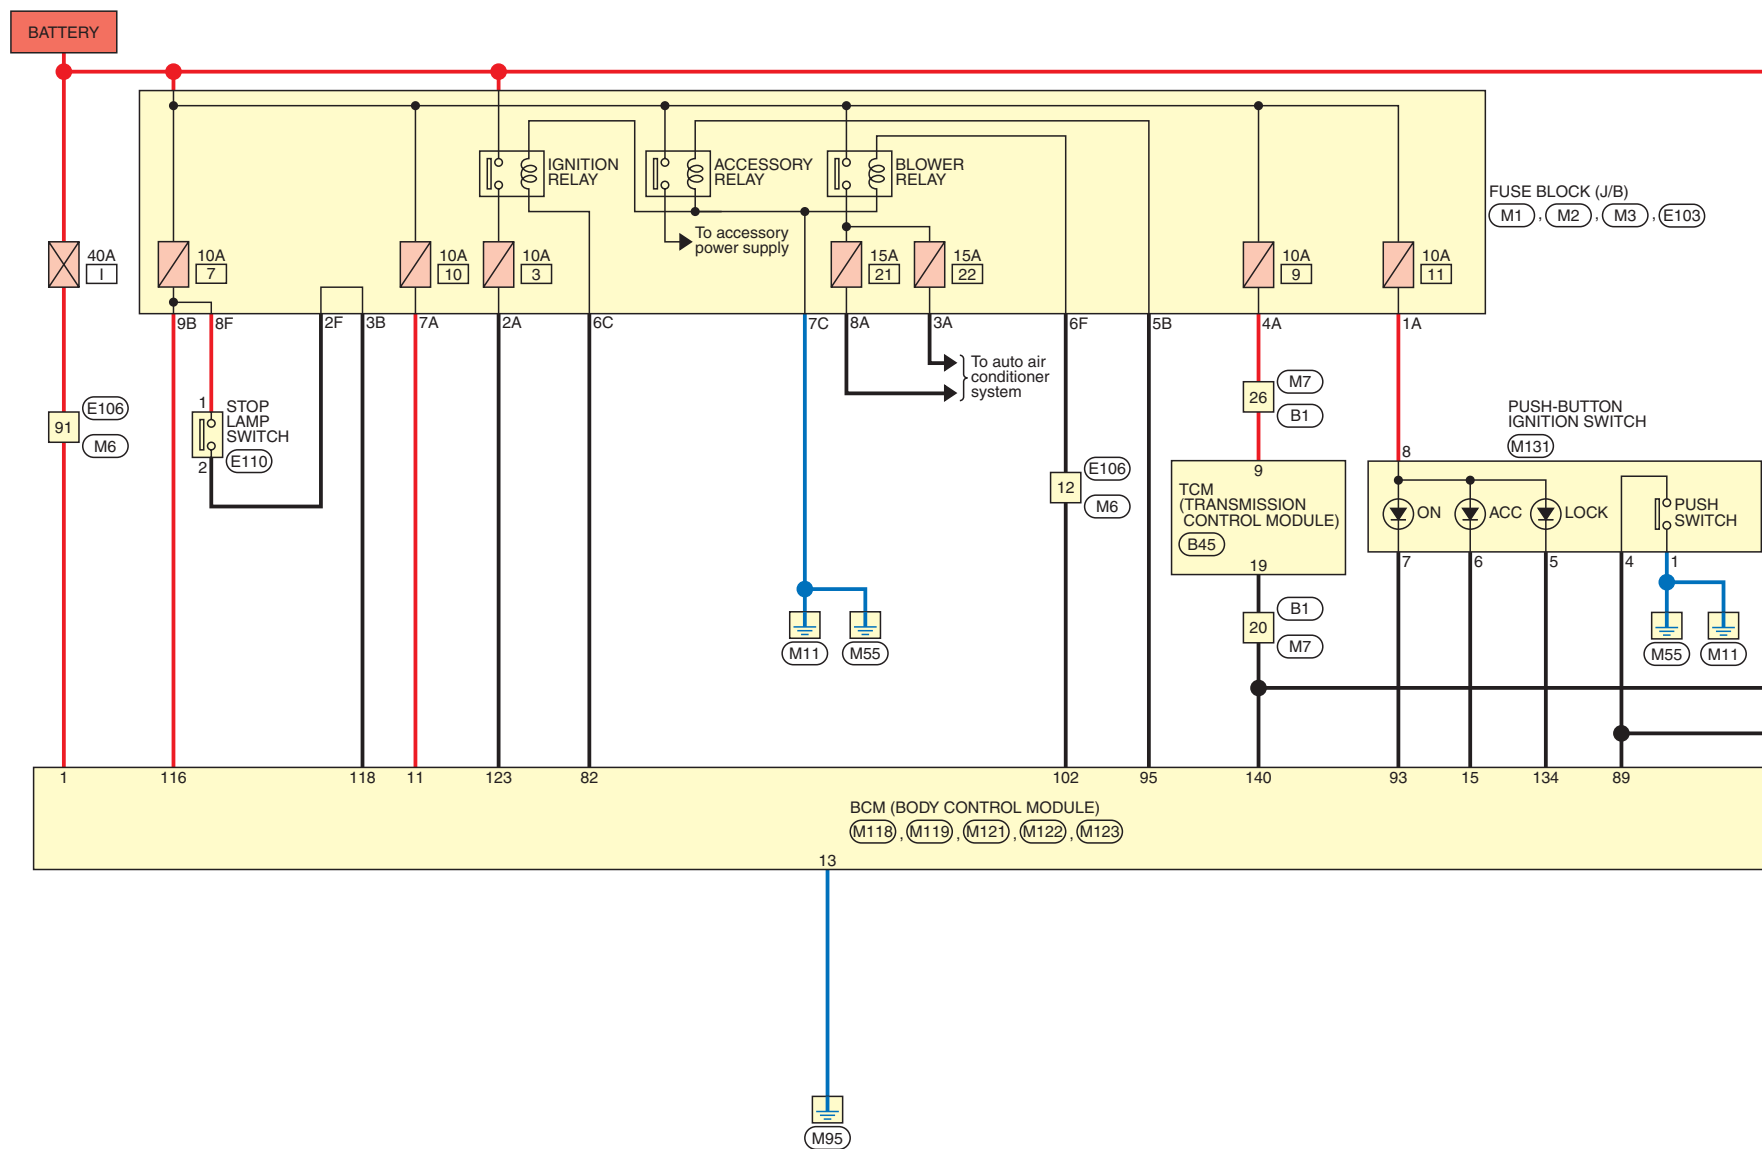

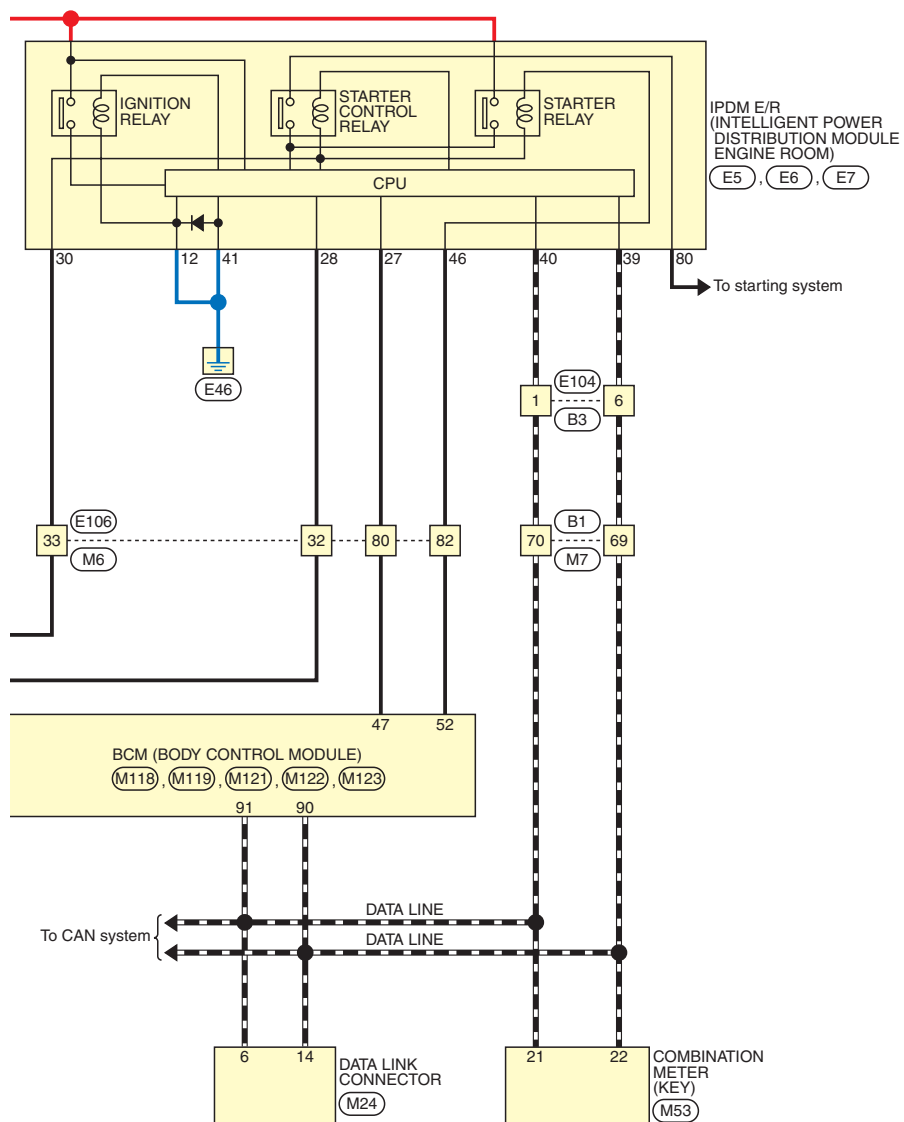


PDS (POWER DISTRIBUTION SYSTEM)

Connector No.	B1
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
20	GR	-
26	P	-
69	P	-
70	L	-

Connector No.	B3
Connector Name	WIRE TO WIRE
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
1	L	-
6	P	-

Connector No.	B45
Connector Name	TCM (TRANSMISSION CONTROL MODULE)
Connector Type	RH40FB-RZ8-L-LH-Z




Terminal No.	Color of Wire	Signal Name [Specification]
9	P	BATT-1
19	GR	STARTER RELAY SIGNAL

Connector No.	E5
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH20FW-CS12-M4-1V




Terminal No.	Color of Wire	Signal Name [Specification]
12	B/W	-
27	Y	-
28	G	-
30	GR	-

Connector No.	E6
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH08FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
39	P	-
40	L	-
41	B/Y	-
46	O	-

Connector No.	E7
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH20FW-CS12-M4




Terminal No.	Color of Wire	Signal Name [Specification]
80	W	-

Connector No.	E103
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS16FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
2F	W	-
6F	O	-
8F	L	-


Connector No.	E104
Connector Name	WIRE TO WIRE
Connector Type	NS12MW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
1	L	-
6	P	-

PDS (POWER DISTRIBUTION SYSTEM)

Connector No.	E106
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
12	O	-
32	G	-
33	GR	-
80	Y	-
82	O	-
91	GR	-

Connector No.	E110
Connector Name	STOP LAMP SWITCH
Connector Type	M04FW-LC




Terminal No.	Color of Wire	Signal Name [Specification]
1	L	-
2	W	-

Connector No.	M1
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS06FW-M2




Terminal No.	Color of Wire	Signal Name [Specification]
1A	V	-
2A	G	-
3A	L	-
4A	LG	-
7A	R	-
8A	L	-

Connector No.	M2
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS10FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
3B	P	-
5B	O	-
9B	SB	-

Connector No.	M3
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
6C	R	-
7C	B	-

Connector No.	M6
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
12	O	-
32	G	-
33	GR	-
80	Y	-
82	SB	-
91	GR	-

Connector No.	M7
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
20	GR	-
26	LG	-
69	P	-
70	L	-

Connector No.	M24
Connector Name	DATA LINK CONNECTOR
Connector Type	BD16FW



Terminal No.	Color of Wire	Signal Name [Specification]
6	L	-
14	P	-

PDS (POWER DISTRIBUTION SYSTEM)

Connector No.	M53
Connector Name	COMBINATION METER
Connector Type	SAB40FW



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40

Terminal No.	Color of Wire	Signal Name [Specification]
21	L	CAN-H
22	P	CAN-L

Connector No.	M118
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	M03FB-LC



1	3
2	

Terminal No.	Color of Wire	Signal Name [Specification]
1	GR	BAT (F/L)

Connector No.	M119
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	NS16FW-CS



4	5	6	7		8	9	10	
11	12	13	14	15	16	17	18	19

Terminal No.	Color of Wire	Signal Name [Specification]
11	R	BAT (FUSE)
13	B	GND
15	Y	ACC IND

Connector No.	M121
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FGY-NH



51	50	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32
71	70	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52

Terminal No.	Color of Wire	Signal Name [Specification]
47	Y	IGN RELAY (IPDM E/R) CONT
52	SB	STARTER RELAY CONT

Connector No.	M122
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FB-NH



91	90	89	88	87	86	85	84	83	82	81	80	79	78	77	76	75	74	73	72
111	110	109	108	107	106	105	104	103	102	101	100	99	98	97	96	95	94	93	92

Terminal No.	Color of Wire	Signal Name [Specification]
82	R	IGN RELAY (F/B) CONT
89	BR	PUSH SW
90	P	CAN-L
91	L	CAN-H
93	V	ON IND
95	O	ACC RELAY CONT
102	O	BLOWER FAN MOTOR RELAY CONT

Connector No.	M123
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FG-NH



131	130	129	128	127	126	125	124	123	122	121	120	119	118	117	116	115	114	113	112
151	150	149	148	147	146	145	144	143	142	141	140	139	138	137	136	135	134	133	132

Terminal No.	Color of Wire	Signal Name [Specification]
116	SB	STOP LAMP SW 1
118	P	STOP LAMP SW 2
123	BR	IGN F/B
134	GR	LOCK IND
140	BR	SHIFT N/P

Connector No.	M131
Connector Name	PUSH-BUTTON IGNITION SWITCH
Connector Type	TK08FBR



1			2	3
4	5	6	7	8

Terminal No.	Color of Wire	Signal Name [Specification]
1	B	-
4	BR	-
5	GR	-
6	Y	-
7	V	-
8	G	-