



HORN

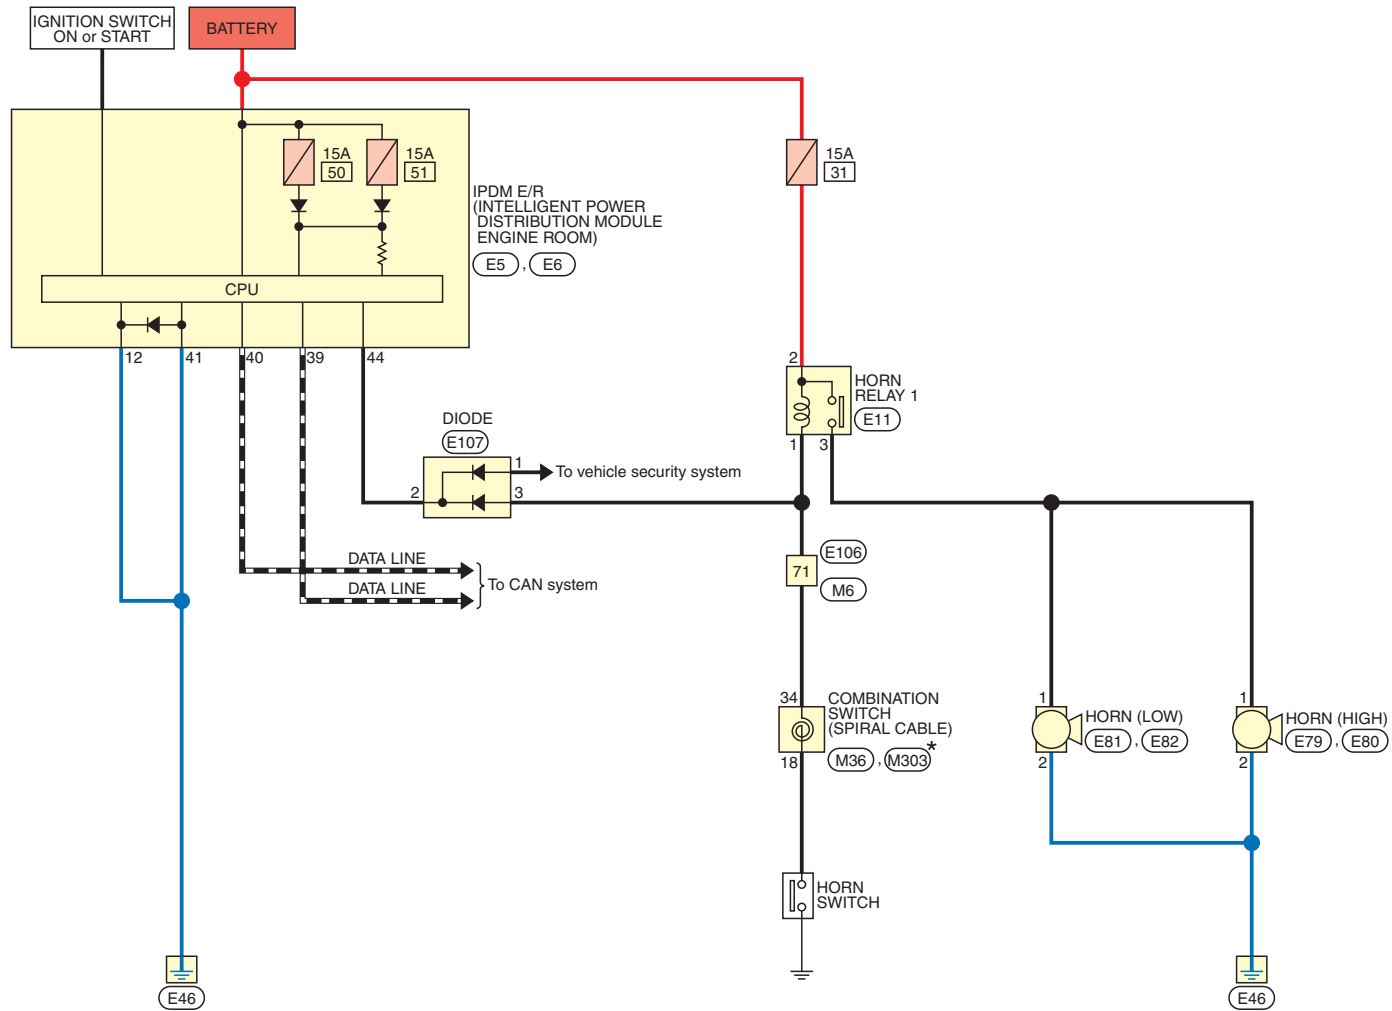

* : This connector is not shown in "Harness Layout".


HORN

| | |
|----------------|--|
| Connector No. | E5 |
| Connector Name | IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM) |
| Connector Type | TH20FW-CS12-M4-1V |



| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 12 | B/W | - |

| | |
|----------------|--|
| Connector No. | E6 |
| Connector Name | IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM) |
| Connector Type | TH08FW-NH |



| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 39 | P | - |
| 40 | L | - |
| 41 | B/Y | - |
| 44 | W | - |

| | |
|----------------|--------------|
| Connector No. | E11 |
| Connector Name | HORN RELAY 1 |
| Connector Type | 24381_7990A |



| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 1 | LG | - |
| 2 | P | - |
| 3 | G | - |

| | |
|----------------|-------------|
| Connector No. | E79 |
| Connector Name | HORN (HIGH) |
| Connector Type | P01FB-A |



| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 1 | G | - |

| | |
|----------------|-------------|
| Connector No. | E80 |
| Connector Name | HORN (HIGH) |
| Connector Type | P01FB-A |



| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 2 | B | - |

| | |
|----------------|------------|
| Connector No. | E81 |
| Connector Name | HORN (LOW) |
| Connector Type | P01FB-A |




| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 1 | G | - |

| | |
|----------------|------------|
| Connector No. | E82 |
| Connector Name | HORN (LOW) |
| Connector Type | P01FB-A |



| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 2 | B | - |


| | |
|----------------|-----------------|
| Connector No. | E106 |
| Connector Name | WIRE TO WIRE |
| Connector Type | TH80FW-CS16-TM4 |



| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 71 | LG | - |


HORN

| | |
|----------------|-------------|
| Connector No. | E107 |
| Connector Name | DIODE |
| Connector Type | 24335_C9903 |




| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 1 | LG | - |
| 2 | W | - |
| 3 | LG | - |

| | |
|----------------|-----------------|
| Connector No. | M6 |
| Connector Name | WIRE TO WIRE |
| Connector Type | TH80MW-CS16-TM4 |




| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 71 | W | - |

| | |
|----------------|-----------------------------------|
| Connector No. | M36 |
| Connector Name | COMBINATION SWITCH (SPIRAL CABLE) |
| Connector Type | TK08FGY-1V |



| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 34 | W | - |

| | |
|----------------|-----------------------------------|
| Connector No. | M303 |
| Connector Name | COMBINATION SWITCH (SPIRAL CABLE) |
| Connector Type | TK08FGY |



| Terminal No. | Color of Wire | Signal Name [Specification] |
|--------------|---------------|-----------------------------|
| 18 | - | - |