



## BACK-UP LAMP

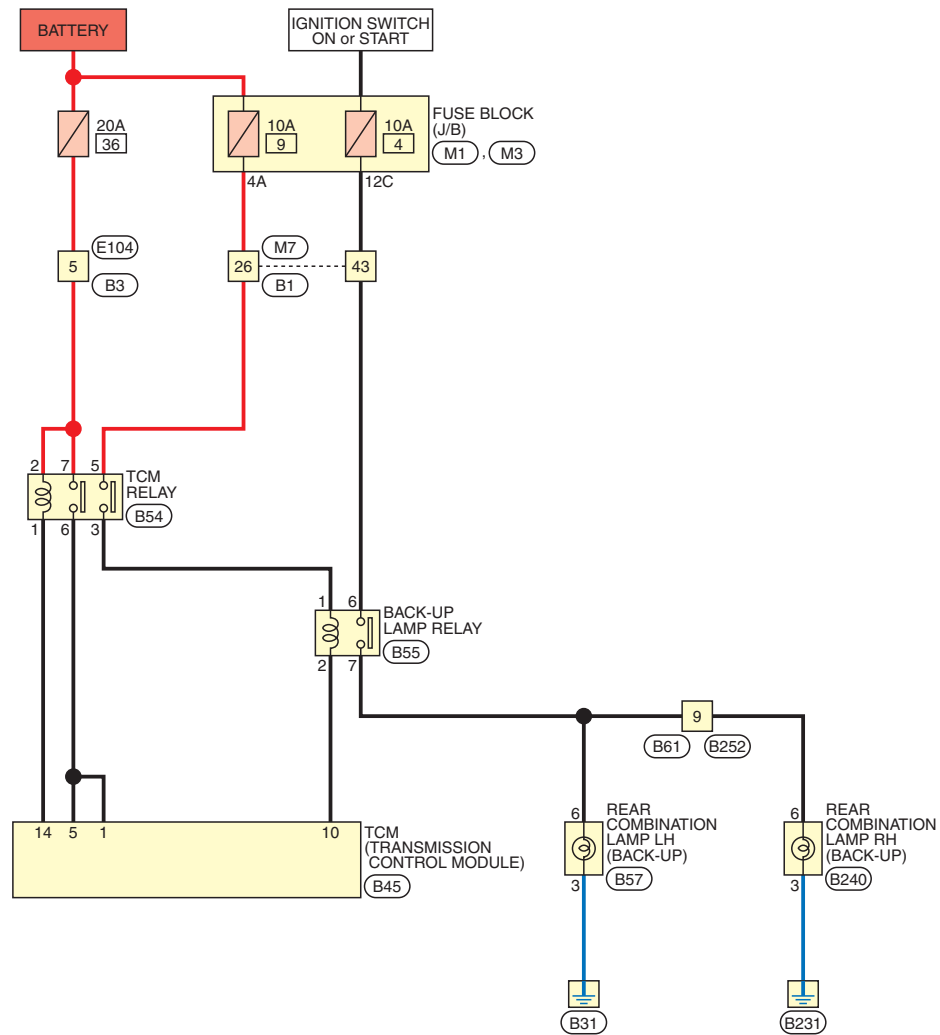


## BACK-UP LAMP

Connector No.	B1
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
26	P	-
43	P	-

Connector No.	B3
Connector Name	WIRE TO WIRE
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
5	R	-

Connector No.	B45
Connector Name	TCM (TRANSMISSION CONTROL MODULE)
Connector Type	RH40FB-RZ8-L-LH-Z




Terminal No.	Color of Wire	Signal Name [Specification]
1	W	BATT-2
5	W	BATT-3
10	LG	BACK-UP LAMP SIGNAL
14	V	POWER OFF

Connector No.	B54
Connector Name	TCM RELAY
Connector Type	M06FBR-R-LC




Terminal No.	Color of Wire	Signal Name [Specification]
1	V	-
2	R	-
3	G	-
5	O	-
6	W	-
7	R	-

Connector No.	B55
Connector Name	BACK-UP LAMP RELAY
Connector Type	M06FBR-R-LC




Terminal No.	Color of Wire	Signal Name [Specification]
1	G	-
2	LG	-
6	P	-
7	Y	-

Connector No.	B57
Connector Name	REAR COMBINATION LAMP LH
Connector Type	NS06MW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
3	B	-
6	Y	-

Connector No.	B61
Connector Name	WIRE TO WIRE
Connector Type	TH12FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
9	O	-


Connector No.	B240
Connector Name	REAR COMBINATION LAMP RH
Connector Type	NS06MW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
3	B	-
6	O	-


BACK-UP LAMP

Connector No.	B252
Connector Name	WIRE TO WIRE
Connector Type	TH12MW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
9	O	-

Connector No.	E104
Connector Name	WIRE TO WIRE
Connector Type	NS12MW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
5	R	-

Connector No.	M1
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS06FW-M2




Terminal No.	Color of Wire	Signal Name [Specification]
4A	LG	-

Connector No.	M3
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS12FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
12C	W	-

Connector No.	M7
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
26	LG	-
43	W	-