



## BOSE AUDIO WITH NAVIGATION SYSTEM

Connector No.	M5
Connector Name	WIRE TO WIRE
Connector Type	TH40MW-CS15




Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-
2	G	-
3	L	-
4	W	-

Connector No.	M6
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
10	Y	-


Connector No.	M7
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
6	L	-
7	W	-
10	R	-
69	P	-
70	L	-
71	SHIELD	-
72	SHIELD	-
80	R	- [With BOSE audio]
81	G	- [With BOSE audio]
82	BR	- [With BOSE audio]
83	Y	- [With BOSE audio]


84	SHIELD	-
85	V	- [With BOSE audio]
86	LG	- [With BOSE audio]
87	L	- [With BOSE audio]
88	P	- [With BOSE audio]
89	SHIELD	-
90	V	-
92	LG	-
93	Y	-
94	G	-
95	R	-
96	Y	-
97	R	-
98	G	-
99	L	-
100	W	-

Connector No.	M14
Connector Name	LOW TIRE PRESSURE WARNING CONTROL UNIT
Connector Type	TH32FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
1	P	CAN-(L)
2	L	CAN+(H)

Connector No.	M24
Connector Name	DATA LINK CONNECTOR
Connector Type	BD16FW

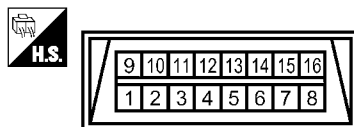


Terminal No.	Color of Wire	Signal Name [Specification]
6	L	-
14	P	-

Connector No.	M36
Connector Name	COMBINATION SWITCH (SPIRAL CABLE)
Connector Type	TK08FGY-IV



Terminal No.	Color of Wire	Signal Name [Specification]
24	V	-
31	SB	-
33	GR	-

Connector No.	M37
Connector Name	STEERING ANGLE SENSOR
Connector Type	TH08FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
2	P	CAN-L
5	L	CAN-H