



## STARTING SYSTEM

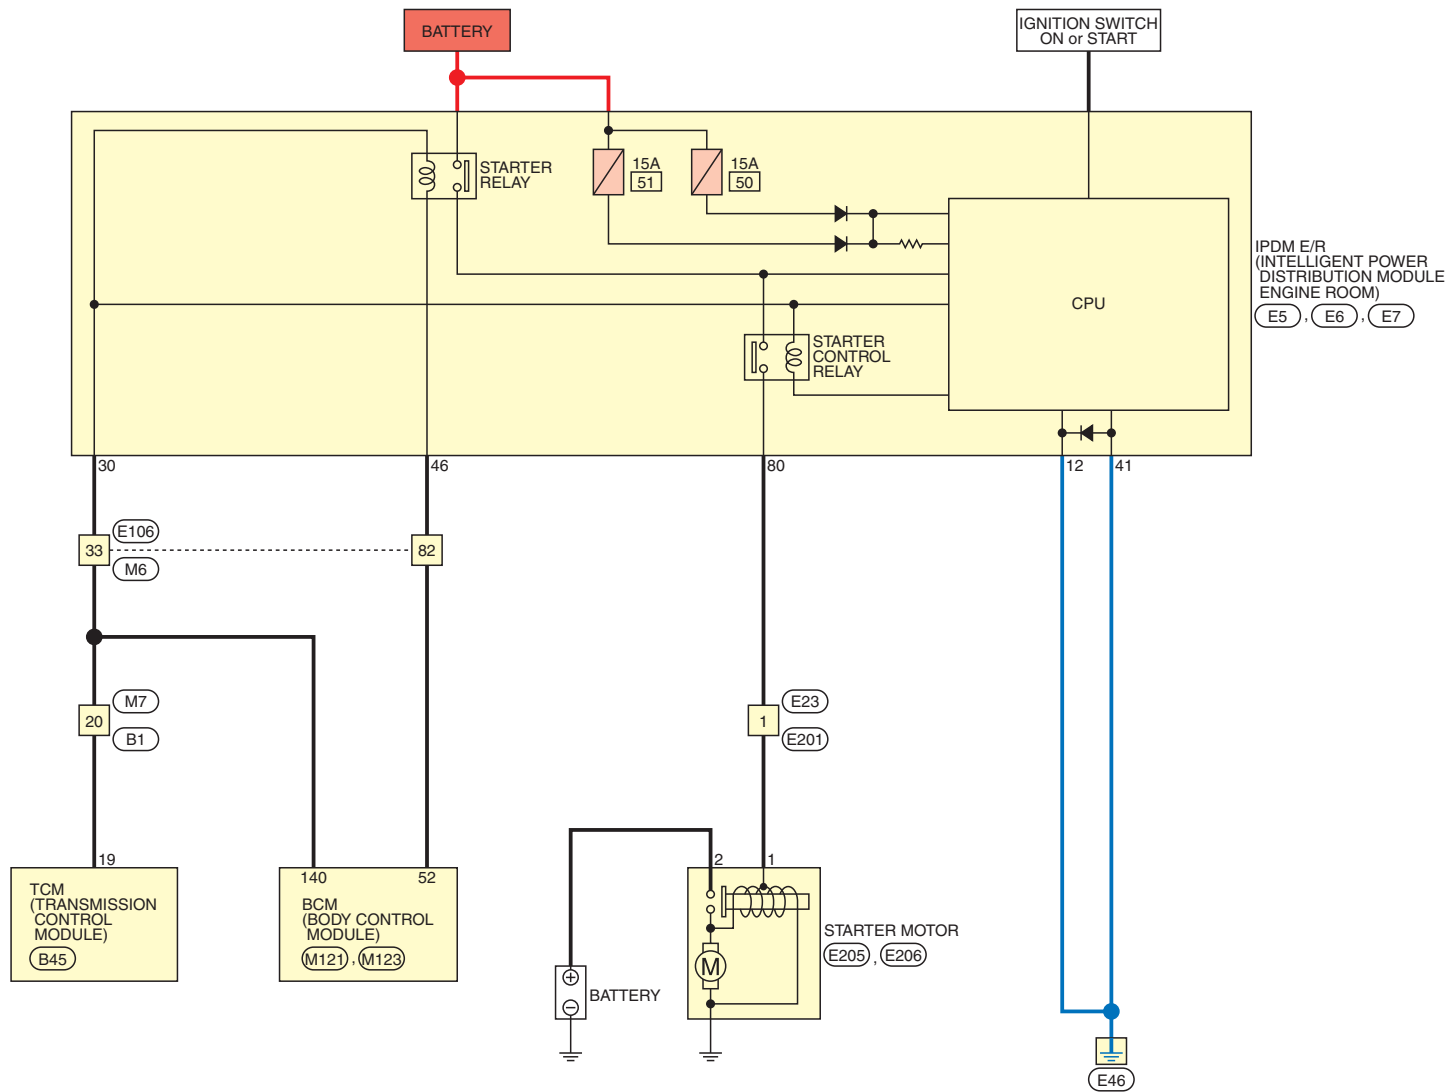


## STARTING SYSTEM

Connector No.	B1
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
20	GR	-

Connector No.	B45
Connector Name	TCM (TRANSMISSION CONTROL MODULE)
Connector Type	RH40FB-RZ8-L-LH-Z




Terminal No.	Color of Wire	Signal Name [Specification]
19	GR	STARTER RELAY SIGNAL

Connector No.	E5
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH20FW-CS12-M4-1V




Terminal No.	Color of Wire	Signal Name [Specification]
12	B/W	-
30	GR	-

Connector No.	E6
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH08FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
41	B/Y	-
46	O	-

Connector No.	E7
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH20FW-CS12-M4




Terminal No.	Color of Wire	Signal Name [Specification]
80	W	-

Connector No.	E23
Connector Name	WIRE TO WIRE
Connector Type	X01FGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-

Connector No.	E106
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
33	GR	-
82	O	-

Connector No.	E201
Connector Name	WIRE TO WIRE
Connector Type	X01MGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-

## STARTING SYSTEM

Connector No.	E205
Connector Name	STARTER MOTOR
Connector Type	24348-51E44




Terminal No.	Color of Wire	Signal Name [Specification]
2	B/R	—

Connector No.	E206
Connector Name	STARTER MOTOR
Connector Type	X01MGY




Terminal No.	Color of Wire	Signal Name [Specification]
1	W	—

Connector No.	M6
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
33	GR	—
82	SB	—

Connector No.	M7
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
20	GR	—

Connector No.	M121
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FGY-NH



Terminal No.	Color of Wire	Signal Name [Specification]
52	SB	STARTER RELAY CONT

Connector No.	M123
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FG-NH



Terminal No.	Color of Wire	Signal Name [Specification]
140	BR	SHIFT N/P