


POWER SEAT FOR PASSENGER SIDE

★ : This connector is not shown in "Harness Layout".

- (BS) : With sliding switch (seat back)
 (OS) : Without sliding switch (seat back)
 ★ 1 19 : (BS)
 7 : (OS)
 ★ 2 20 : (BS)
 8 : (OS)

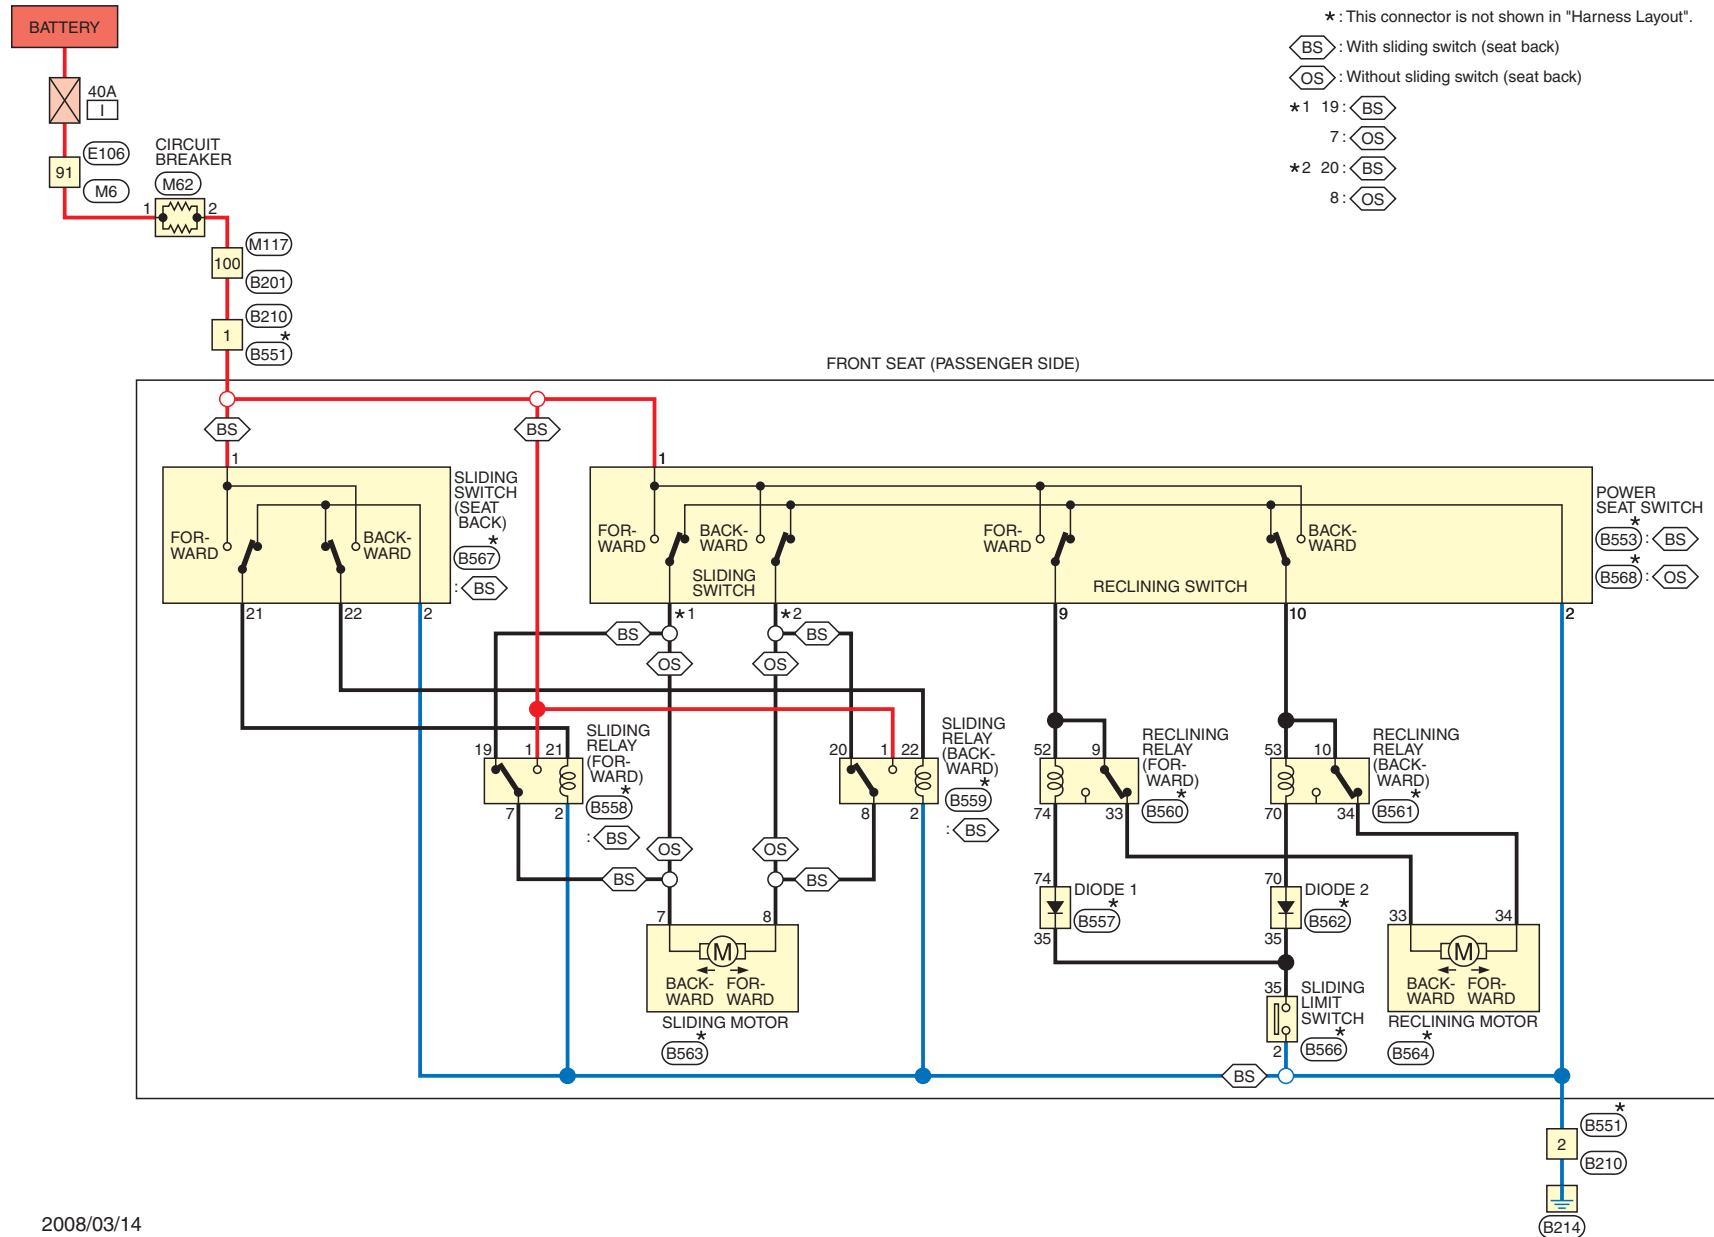


Connector No.	B201
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4

Terminal No.	Color of Wire	Signal Name [Specification]
100	W	-

Connector No.	B210
Connector Name	WIRE TO WIRE
Connector Type	NS06FW-CS

Terminal No.	Color of Wire	Signal Name [Specification]
1	W	—
2	B	—

Connector No.	B551
Connector Name	WIRE TO WIRE
Connector Type	NS06MW-CS



H.S.

2		1
6	5	4 3

Terminal No.	Color of Wire	Signal Name [Specification]
1	L/W	—
2	B	—

Connector No.	B553
Connector Name	POWER SEAT SWITCH (WITH SLIDING SWITCH)
Connector Type	NS08FW-CS

The logo consists of a square divided diagonally. The top-left triangle contains a stylized drawing of a person sitting at a desk with a lamp. The bottom-right triangle is black with the white text "H.S.". To the right of the logo is a 2x5 grid of numbers:

9				
1	2	19	20	10


Terminal No.	Color of Wire	Signal Name [Specification]
1	L/W	—
2	B	—
9	W	—
10	L	—
19	W/R	—
20	W/B	—

Connector No.	B557
Connector Name	DIODE 1
Connector Type	24335C9900





Terminal No.	Color of Wire	Signal Name [Specification]
35	Y	—
74	B/W	—

Connector No.	B558
Connector Name	SLIDING RELAY (FORWARD)
Connector Type	MS03FB-M2



Terminal No.	Color of Wire	Signal Name [Specification]
1	L/W	—
2	B	—
7	R	—
19	W/R	—
21	B/Y	—

Connector No.	B559
Connector Name	SLIDING RELAY (BACKWARD)
Connector Type	MS03FB-M2

Terminal No.	Color of Wire	Signal Name [Specification]
1	L/W	—
2	B	—
8	LG	—
20	W/B	—
22	L/R	—


Connector No.	B560
Connector Name	RECLINING RELAY (FORWARD)
Connector Type	MS03FB-M2

The H.S. logo is a square divided diagonally. The top-left triangle is white with a black outline of a person's head and shoulders. The bottom-right triangle is black with the white text "H.S.". To the right of the logo is a diagram of a 3x3 grid. The top row contains the number 9 in the center. The bottom row contains the numbers 52, 33, and 74 from left to right. All other cells in the grid are empty.

Terminal No.	Color of Wire	Signal Name [Specification]
9	W	-
33	B	-
52	W	-
74	B/W	-

POWER SEAT FOR PASSENGER SIDE

Connector No.	B561
Connector Name	RECLINING RELAY (BACKWARD)
Connector Type	MS03FB-M2



Terminal No.	Color of Wire	Signal Name [Specification]
10	L	-
34	R/W	-
53	L	-
70	W/B	-

Connector No.	B562
Connector Name	DIODE 2
Connector Type	24335C9900



Terminal No.	Color of Wire	Signal Name [Specification]
35	Y	-
70	W/B	-

Connector No.	B563
Connector Name	SLIDING MOTOR
Connector Type	6098-0239



Terminal No.	Color of Wire	Signal Name [Specification]
7	R	-
8	LG	-

Connector No.	B564
Connector Name	RECLINING MOTOR
Connector Type	NS02FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
33	B	-
34	R/W	-

Connector No.	B566
Connector Name	SLIDING LIMIT SWITCH
Connector Type	S02FW




Terminal No.	Color of Wire	Signal Name [Specification]
2	B	-
35	Y	-

Connector No.	B567
Connector Name	SLIDING SWITCH (SEAT BACK)
Connector Type	NS04MW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
1	L/W	-
2	B	-
21	B/Y	-
22	L/R	-

Connector No.	B568
Connector Name	POWER SEAT SWITCH (WITHOUT SLIDING SWITCH)
Connector Type	NS08FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
1	L/W	-
2	B	-
7	R	-
8	LG	-
9	W	-
10	L	-


Connector No.	E106
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
91	GR	-

POWER SEAT FOR PASSENGER SIDE

Connector No.	M6
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
91	GR	-

Connector No.	M62
Connector Name	CIRCUIT BREAKER
Connector Type	M02FW-P-LC



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-
2	W	-

Connector No.	M117
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
100	W	-