




BATTERY POWER SUPPLY

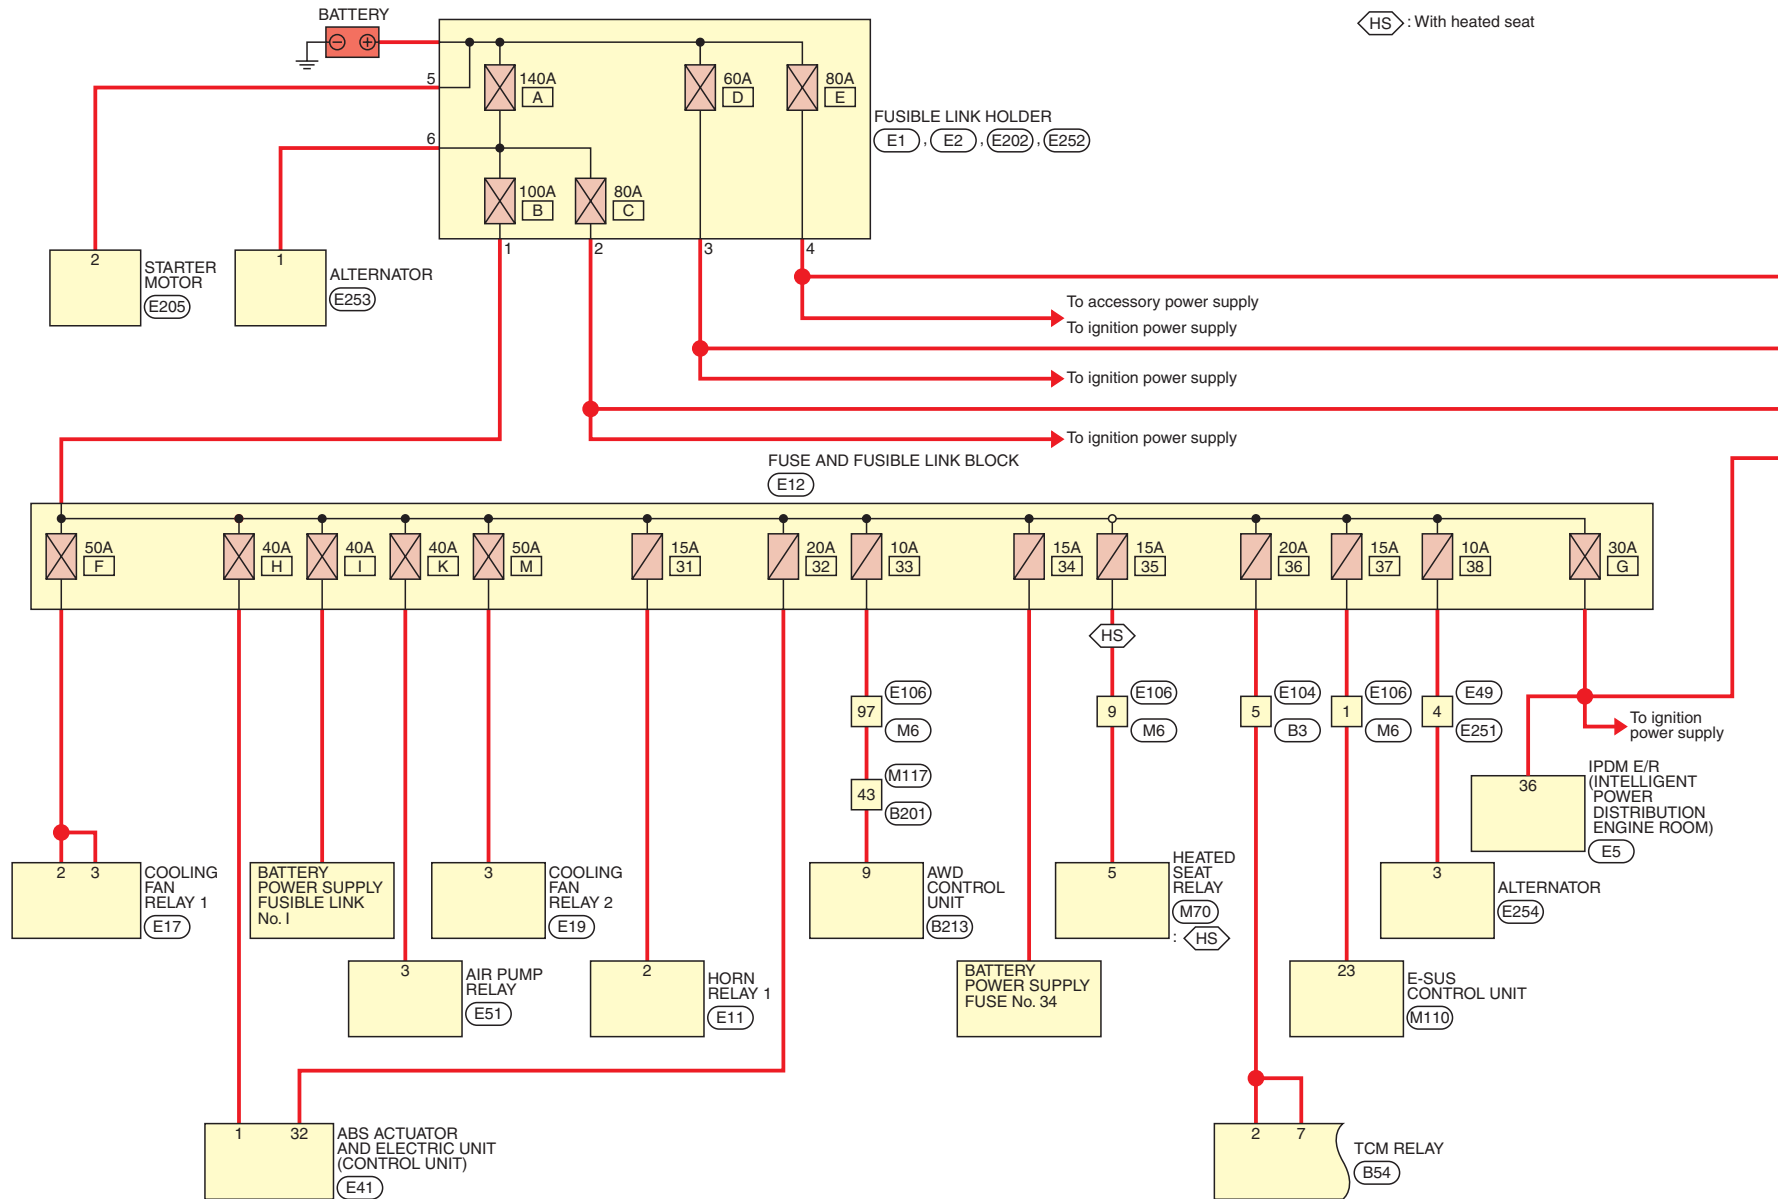


WB : With BOSE audio

OB : Without BOSE audio

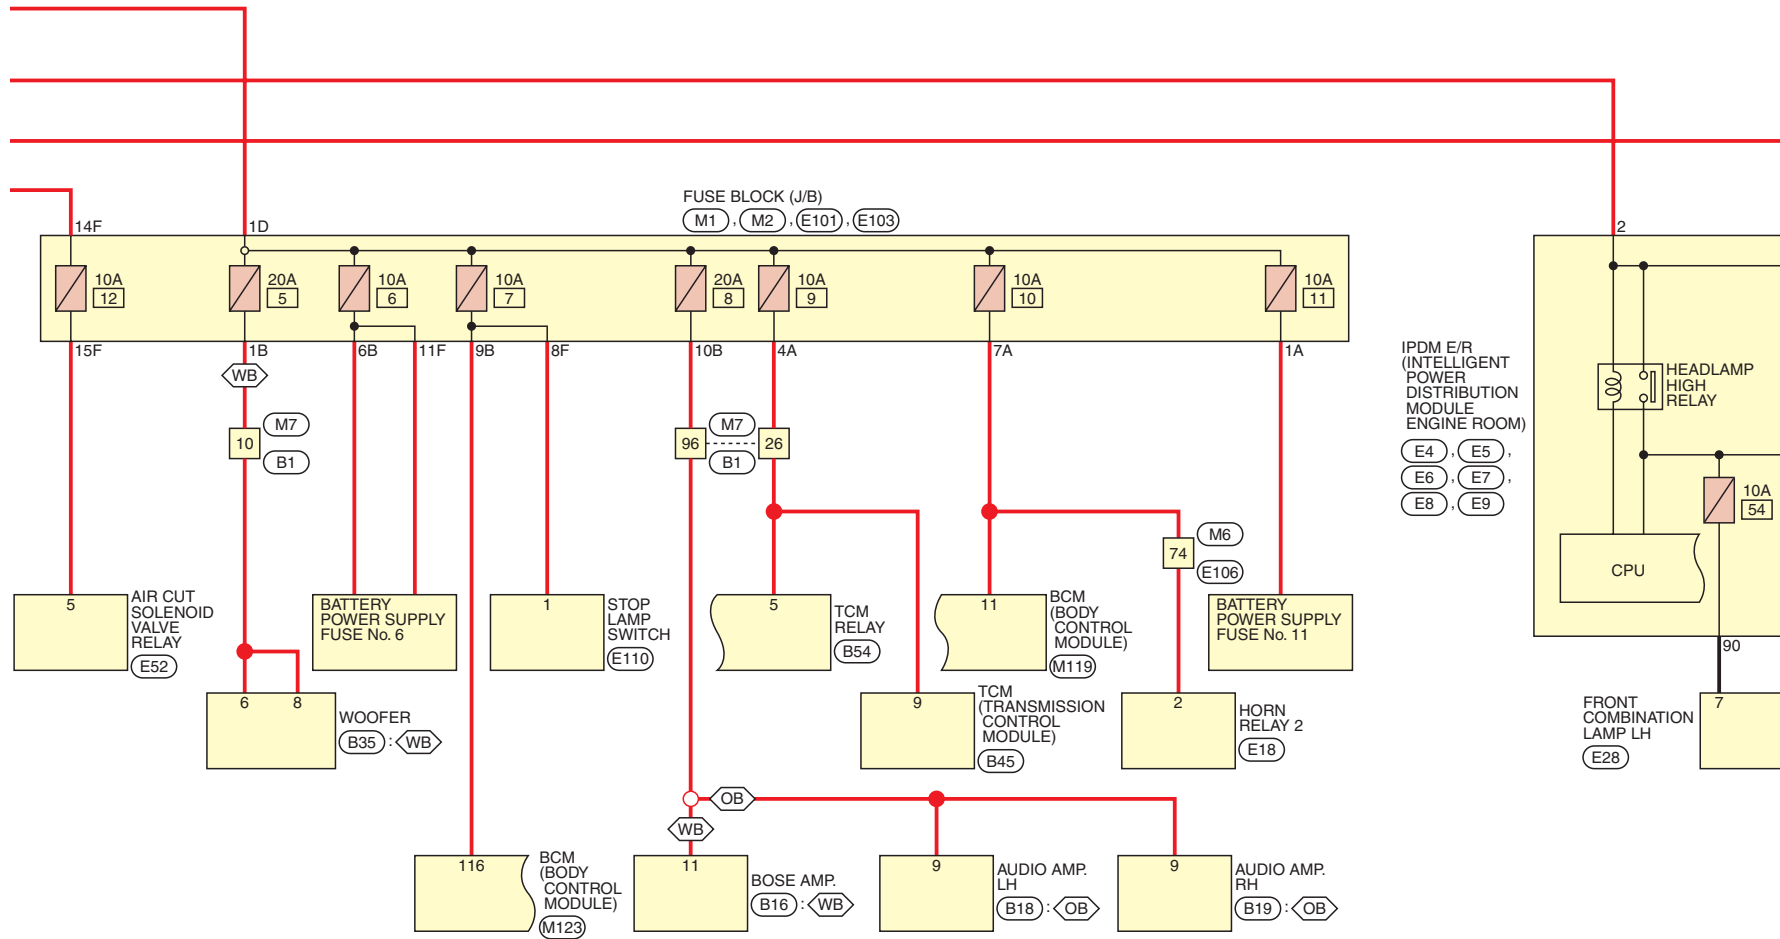


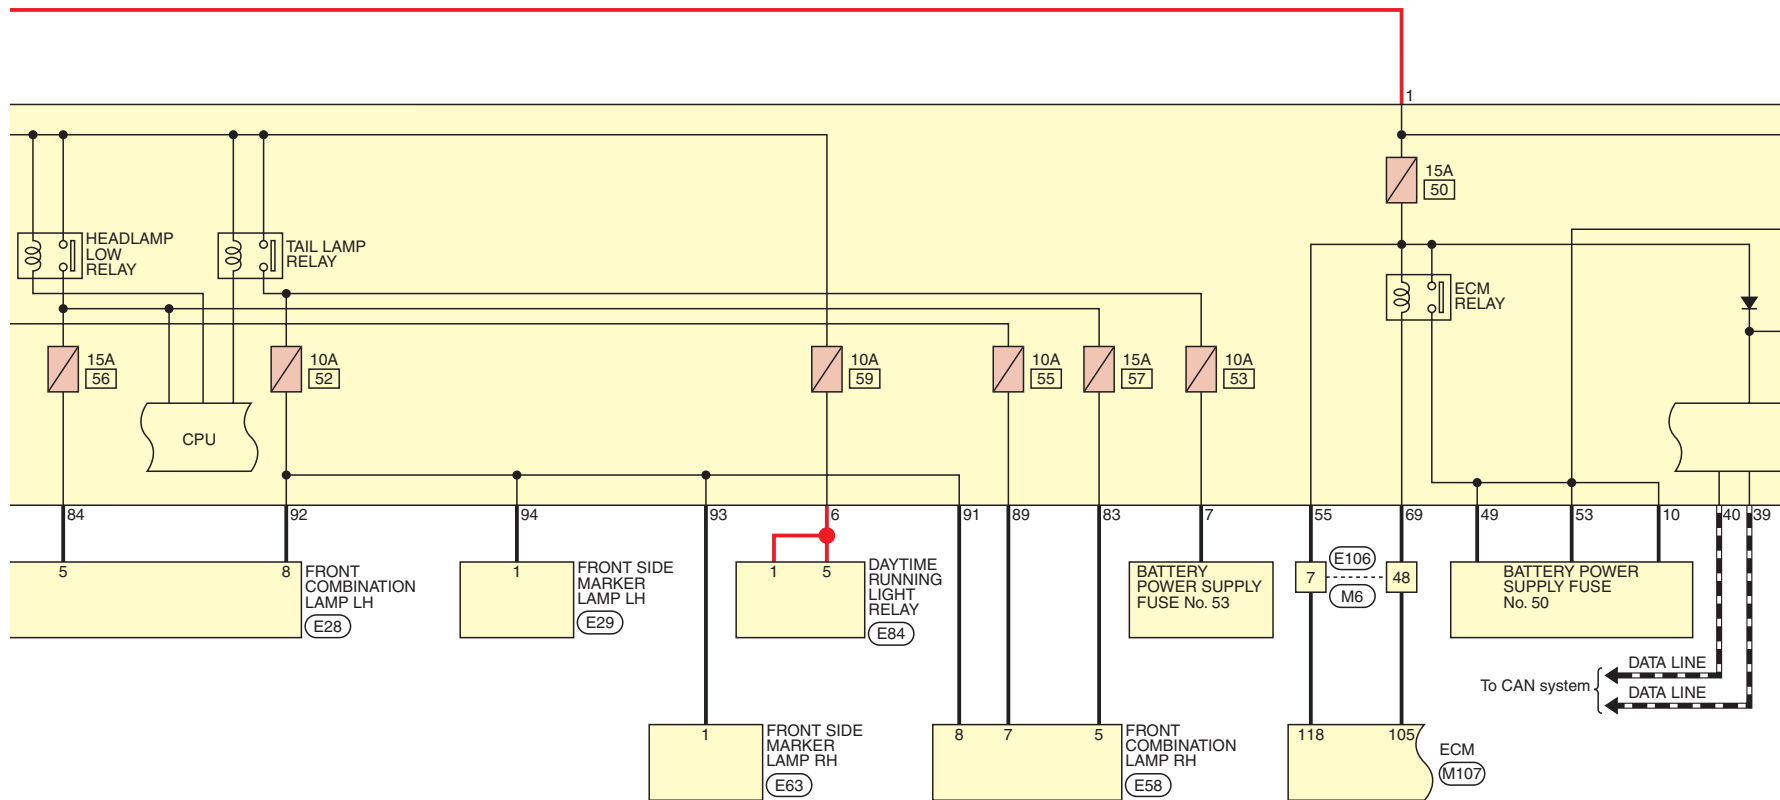

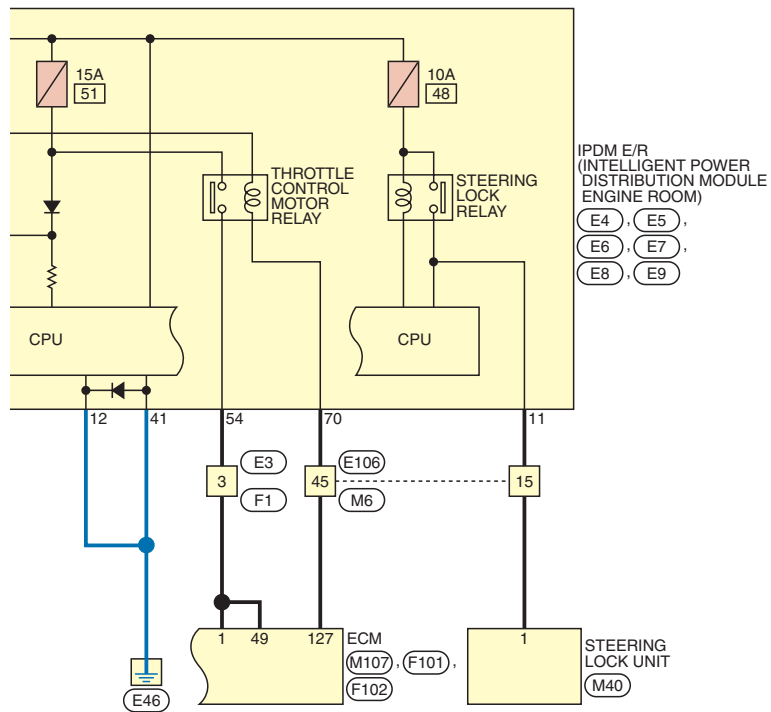


BATTERY POWER SUPPLY

Connector No.	B1
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
10	R	-
26	P	-
96	Y	-

Connector No.	B3
Connector Name	WIRE TO WIRE
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
5	R	-

Connector No.	B16
Connector Name	BOSE AMP.
Connector Type	SGA12FBR-SJA2




Terminal No.	Color of Wire	Signal Name [Specification]
11	Y	BATTERY

Connector No.	B18
Connector Name	AUDIO AMP. LH
Connector Type	NS10FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
9	Y	BATTERY

Connector No.	B19
Connector Name	AUDIO AMP. RH
Connector Type	NS10FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
9	Y	BATTERY

Connector No.	B35
Connector Name	WOOFER
Connector Type	NS08FBR-CS




Terminal No.	Color of Wire	Signal Name [Specification]
6	R	BATTERY
8	R	BATTERY

Connector No.	B45
Connector Name	TCM (TRANSMISSION CONTROL MODULE)
Connector Type	RH40FB-RZ8-L-LH-Z



Terminal No.	Color of Wire	Signal Name [Specification]
9	P	BATT-1


Connector No.	B54
Connector Name	TCM RELAY
Connector Type	M06FBR-R-LC



Terminal No.	Color of Wire	Signal Name [Specification]
2	R	-
5	O	-
7	R	-


BATTERY POWER SUPPLY

Connector No.	B201
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
43	Y	-

Connector No.	B213
Connector Name	AWD CONTROL UNIT
Connector Type	TH16FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
9	Y	SOLVB

Connector No.	E1
Connector Name	FUSIBLE LINK HOLDER
Connector Type	L02FBR-MC



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-
2	W	-

Connector No.	E2
Connector Name	FUSIBLE LINK HOLDER
Connector Type	L02FGY-MC



Terminal No.	Color of Wire	Signal Name [Specification]
3	Y	-
4	R	-

Connector No.	E3
Connector Name	WIRE TO WIRE
Connector Type	RS08FB-PR



Terminal No.	Color of Wire	Signal Name [Specification]
3	W	-

Connector No.	E4
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	L02FB-MC



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-
2	Y	-

Connector No.	E5
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH20FW-CS12-M4-1V



Terminal No.	Color of Wire	Signal Name [Specification]
6	O	-
7	R	-
10	W	-
11	SB	-
12	B/W	-
36	LG	-


Connector No.	E6
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH08FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
39	P	-
40	L	-
41	B/Y	-


BATTERY POWER SUPPLY

Connector No.	E7
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH20FW-CS12-M4




Terminal No.	Color of Wire	Signal Name [Specification]
49	P	-
53	SB	-
54	W	-
55	O	-
69	O	-
70	G	-

Connector No.	E8
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	NS08FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
83	R	-
84	P	-
89	BR	-
90	O	-

Connector No.	E9
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH16FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
91	O	-
92	R	-
93	V	-
94	G	-

Connector No.	E11
Connector Name	HORN RELAY 1
Connector Type	24381_7990A



Terminal No.	Color of Wire	Signal Name [Specification]
2	P	-

Connector No.	E17
Connector Name	COOLING FAN RELAY 1
Connector Type	SJZ01FGY-SNZ2




Terminal No.	Color of Wire	Signal Name [Specification]
2	O	-
3	O	-

Connector No.	E18
Connector Name	HORN RELAY 2
Connector Type	M03FW-R-LC




Terminal No.	Color of Wire	Signal Name [Specification]
2	P	-

Connector No.	E19
Connector Name	COOLING FAN RELAY 2
Connector Type	SJZ01FGY-SNZ2



Terminal No.	Color of Wire	Signal Name [Specification]
3	P	-

Connector No.	E28
Connector Name	FRONT COMBINATION LAMP LH
Connector Type	RS08FB-PR



Terminal No.	Color of Wire	Signal Name [Specification]
5	P	-
7	O	-
8	R	-


BATTERY POWER SUPPLY

Connector No.	E29
Connector Name	FRONT SIDE MARKER LAMP LH
Connector Type	RK02FBR-DGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	G	—

Connector No.	E41
Connector Name	ABS ACTUATOR AND ELECTRIC UNIT (CONTROL UNIT)
Connector Type	AEZ43FB-AJZ4




Terminal No.	Color of Wire	Signal Name [Specification]
1	R	UBMR
32	O	UBVR

Connector No.	E49
Connector Name	WIRE TO WIRE
Connector Type	RH08MB




Terminal No.	Color of Wire	Signal Name [Specification]
4	P	—

Connector No.	E51
Connector Name	AIR PUMP RELAY
Connector Type	24347_9F900




Terminal No.	Color of Wire	Signal Name [Specification]
3	W	—

Connector No.	E52
Connector Name	AIR CUT SOLENOID VALVE RELAY
Connector Type	MS02FL-M2



Terminal No.	Color of Wire	Signal Name [Specification]
5	P	—

Connector No.	E58
Connector Name	FRONT COMBINATION LAMP RH
Connector Type	RS08FB-PR




Terminal No.	Color of Wire	Signal Name [Specification]
5	R	—
7	BR	—
8	O	—

Connector No.	E63
Connector Name	FRONT SIDE MARKER LAMP RH
Connector Type	RK02FBR-DGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	V	—

Connector No.	E84
Connector Name	DAYTIME RUNNING LIGHT RELAY
Connector Type	MS03FB-M2



Terminal No.	Color of Wire	Signal Name [Specification]
1	O	—
5	O	—


BATTERY POWER SUPPLY

Connector No.	E101
Connector Name	FUSE BLOCK (J/B)
Connector Type	L01FW-MC




Terminal No.	Color of Wire	Signal Name [Specification]
1D	R	-

Connector No.	E103
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS16FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
8F	L	-
11F	Y	-
14F	LG	-
15F	P	-

Connector No.	E104
Connector Name	WIRE TO WIRE
Connector Type	NS12MW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
5	R	-

Connector No.	E106
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
1	V	-
7	O	-
9	W	-
15	SB	-
45	G	-
48	O	-
74	P	-
97	L	-

Connector No.	E110
Connector Name	STOP LAMP SWITCH
Connector Type	M04FW-LC



Terminal No.	Color of Wire	Signal Name [Specification]
1	L	-

Connector No.	E202
Connector Name	FUSIBLE LINK HOLDER
Connector Type	24340_79908




Terminal No.	Color of Wire	Signal Name [Specification]
5	B/R	-

Connector No.	E205
Connector Name	STARTER MOTOR
Connector Type	24348_51E44



Terminal No.	Color of Wire	Signal Name [Specification]
2	B/R	-

Connector No.	E251
Connector Name	WIRE TO WIRE
Connector Type	RH08FB



Terminal No.	Color of Wire	Signal Name [Specification]
4	V	-

BATTERY POWER SUPPLY

Connector No.	E252
Connector Name	FUSIBLE LINK HOLDER
Connector Type	24340_79905



Terminal No.	Color of Wire	Signal Name [Specification]
6	B	-

Connector No.	E253
Connector Name	ALTERNATOR
Connector Type	24340_65F45




Terminal No.	Color of Wire	Signal Name [Specification]
1	B	B

Connector No.	E254
Connector Name	ALTERNATOR
Connector Type	HS03FB




Terminal No.	Color of Wire	Signal Name [Specification]
3	V	S

Connector No.	F1
Connector Name	WIRE TO WIRE
Connector Type	RS08MB-PR




Terminal No.	Color of Wire	Signal Name [Specification]
3	Y	-

Connector No.	F101
Connector Name	ECM
Connector Type	RH40FB-RZ8-L-LH-Z




Terminal No.	Color of Wire	Signal Name [Specification]
1	Y	VMOT-B2

Connector No.	F102
Connector Name	ECM
Connector Type	RH40FBR-RZ8-L-LH-Z




Terminal No.	Color of Wire	Signal Name [Specification]
49	Y	VMOT-B1

Connector No.	M1
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS06FW-M2



Terminal No.	Color of Wire	Signal Name [Specification]
1A	V	-
4A	LG	-
7A	R	-


Connector No.	M2
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS10FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
1B	R	-
6B	Y	-
9B	SB	-
10B	Y	-


BATTERY POWER SUPPLY

Connector No.	M6
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
1	L	-
7	W	-
9	L	-
15	BR	-
45	G	-
48	W	-
74	R	-
97	L	-

Connector No.	M7
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
10	R	-
26	LG	-
96	Y	-

Connector No.	M40
Connector Name	STEERING LOCK UNIT
Connector Type	TH08FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
1	BR	S/L 12V (MECHANICAL)

Connector No.	M70
Connector Name	HEATED SEAT RELAY
Connector Type	MS02FL-M2-LC




Terminal No.	Color of Wire	Signal Name [Specification]
5	L	-

Connector No.	M107
Connector Name	ECM
Connector Type	RH24FGY-RZ8-R-LH-Z




Terminal No.	Color of Wire	Signal Name [Specification]
105	W	SSOFF
118	W	BATT
127	G	MOTRLY

Connector No.	M110
Connector Name	E-SUS CONTROL UNIT
Connector Type	FEC21FB-FHC2




Terminal No.	Color of Wire	Signal Name [Specification]
23	L	BAT

Connector No.	M117
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
43	L	-


Connector No.	M119
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	NS16FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
11	R	BAT (FUSE)

BATTERY POWER SUPPLY

Connector No.	M123
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FG-NH



Terminal No.	Color of Wire	Signal Name [Specification]
116	SB	STOP LAMP SW 1