



PARKING, LICENSE PLATE AND TAIL LAMPS

* : This connector is not shown in "Harness Layout".

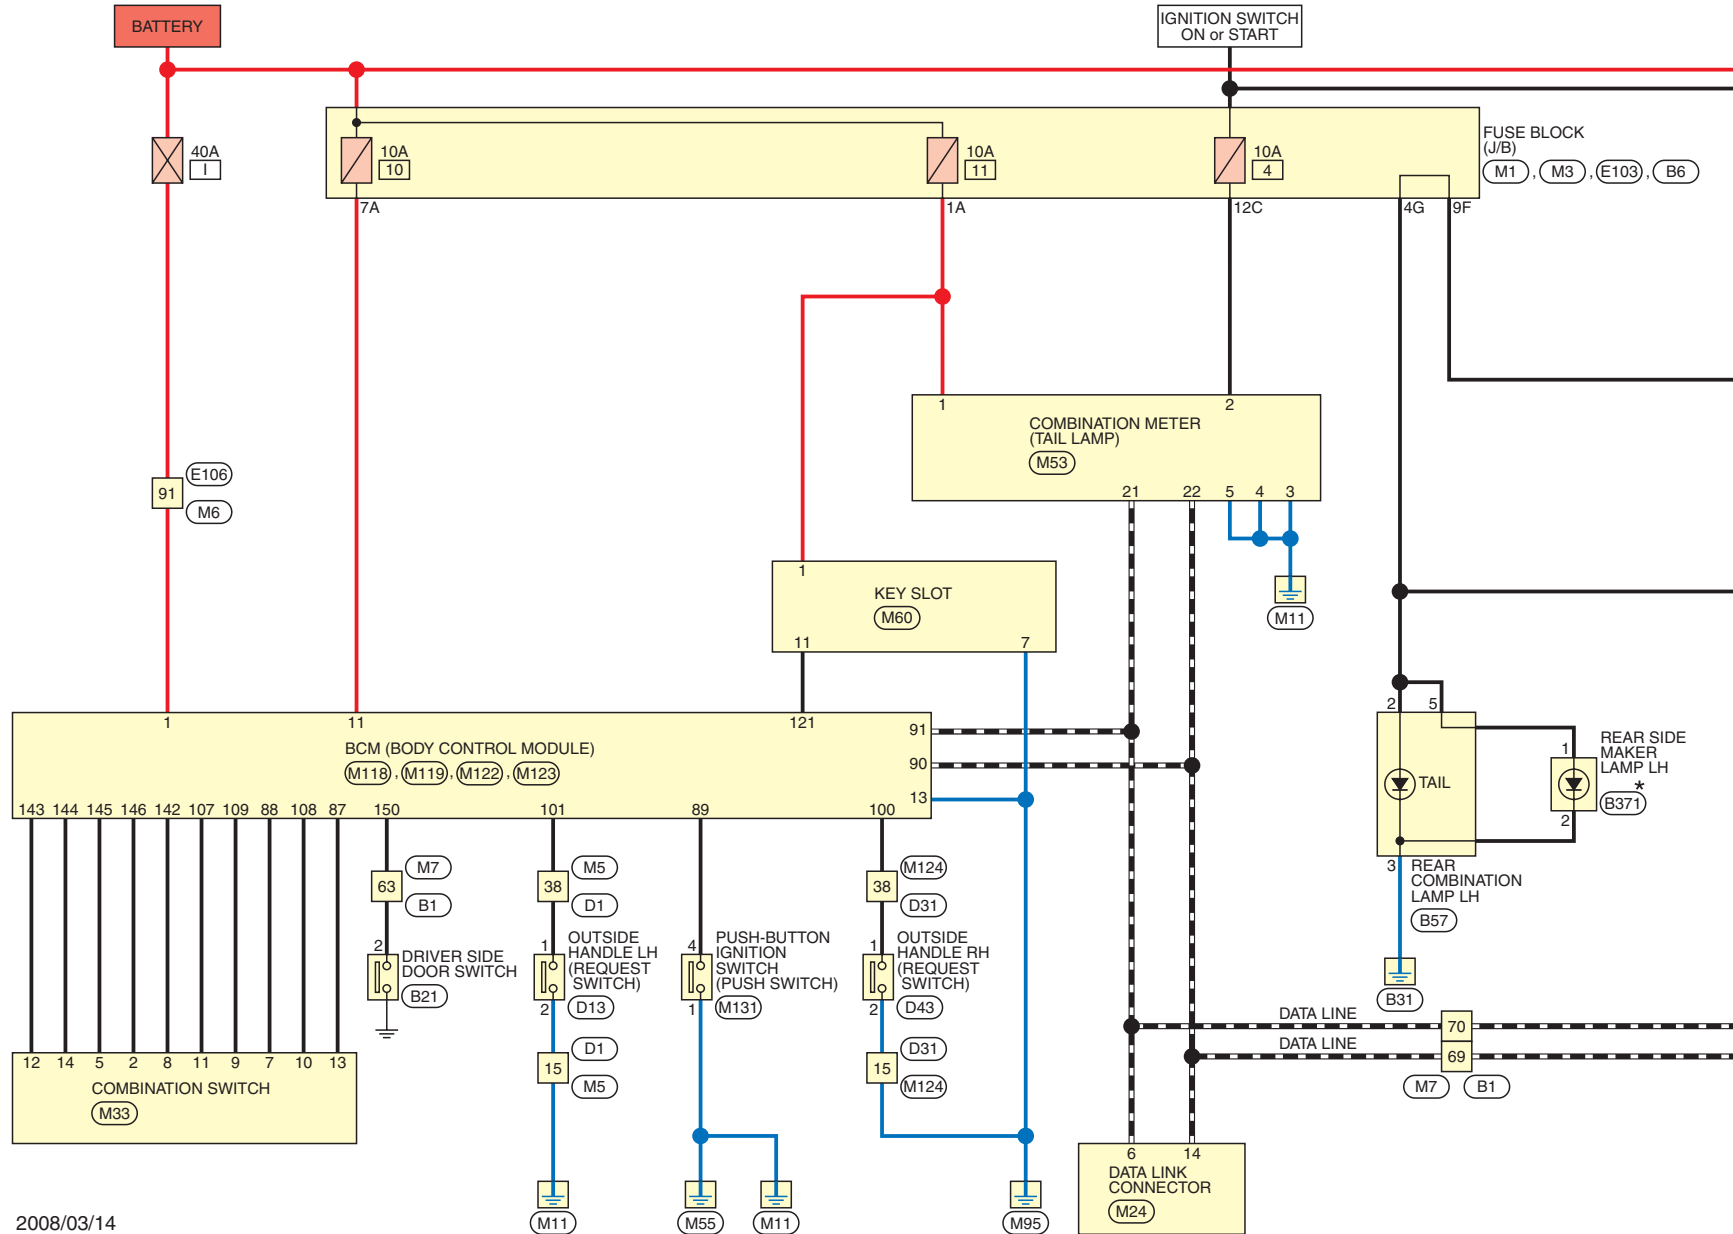


★ : This connector is not shown in "Harness Layout".

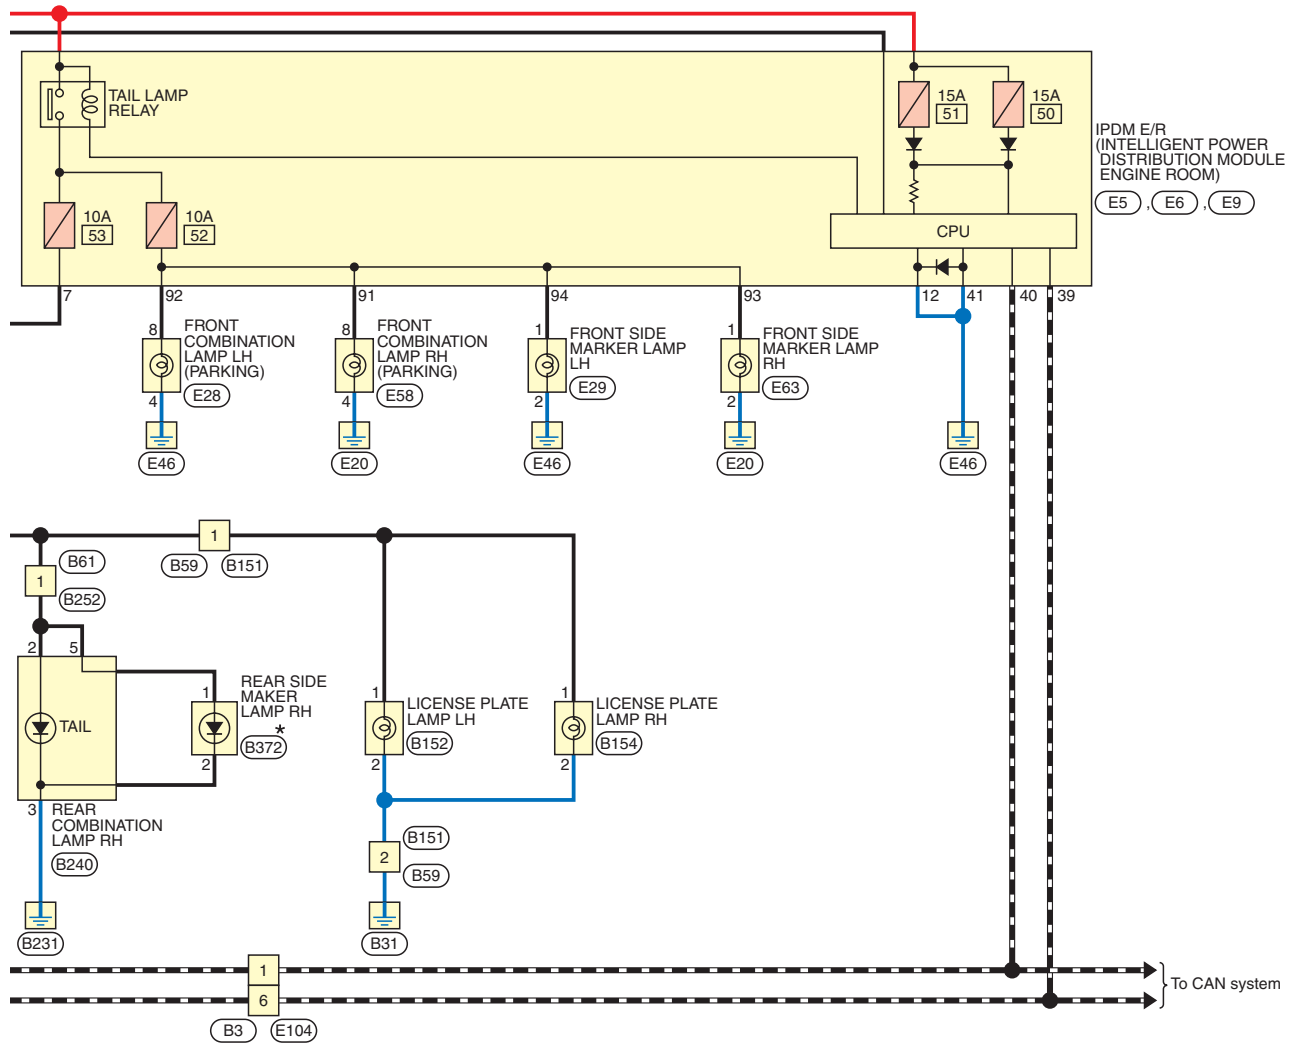


PARKING, LICENSE PLATE AND TAIL LAMPS

Connector No.	B1
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
63	LG	-
69	P	-
70	L	-

Connector No.	B3
Connector Name	WIRE TO WIRE
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
1	L	-
6	P	-

Connector No.	B6
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS12FBR-CS




Terminal No.	Color of Wire	Signal Name [Specification]
4G	R	-

Connector No.	B21
Connector Name	DRIVER SIDE DOOR SWITCH
Connector Type	A03FW




Terminal No.	Color of Wire	Signal Name [Specification]
2	LG	-

Connector No.	B57
Connector Name	REAR COMBINATION LAMP LH
Connector Type	NS06MW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
2	R	-
3	B	-
5	R	-

Connector No.	B59
Connector Name	WIRE TO WIRE
Connector Type	RH04MB




Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-
2	B	-

Connector No.	B61
Connector Name	WIRE TO WIRE
Connector Type	TH12FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-

Connector No.	B151
Connector Name	WIRE TO WIRE
Connector Type	RH04FB



Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-
2	B	-

PARKING, LICENSE PLATE AND TAIL LAMPS

Connector No.	B152
Connector Name	LICENSE PLATE LAMP LH
Connector Type	RK02FBR




Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-
2	B	-

Connector No.	B154
Connector Name	LICENSE PLATE LAMP RH
Connector Type	RK02FBR




Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-
2	B	-

Connector No.	B240
Connector Name	REAR COMBINATION LAMP RH
Connector Type	NS06MW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
2	R	-
3	B	-
5	R	-

Connector No.	B252
Connector Name	WIRE TO WIRE
Connector Type	TH12MW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-

Connector No.	B371
Connector Name	REAR SIDE MARKER LAMP LH
Connector Type	RS02MBR




Terminal No.	Color of Wire	Signal Name [Specification]
1	-	-
2	-	-

Connector No.	B372
Connector Name	REAR SIDE MARKER LAMP RH
Connector Type	RS02MBR



Terminal No.	Color of Wire	Signal Name [Specification]
1	-	-
2	-	-

Connector No.	D1
Connector Name	WIRE TO WIRE
Connector Type	TH40FW-CS15



Terminal No.	Color of Wire	Signal Name [Specification]
15	B	-
38	W	-


Connector No.	D13
Connector Name	OUTSIDE HANDLE LH (REQUEST SWITCH)
Connector Type	RK02MGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-
2	B	-

PARKING, LICENSE PLATE AND TAIL LAMPS

Connector No.	D31
Connector Name	WIRE TO WIRE
Connector Type	TH40FW-CS15

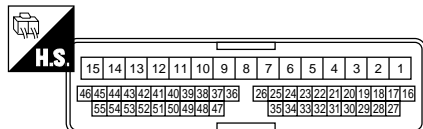

Terminal No.	Color of Wire	Signal Name [Specification]
15	B	-
38	W	-

Connector No.	D43
Connector Name	OUTSIDE HANDLE RH (REQUEST SWITCH)
Connector Type	RK02MGY




Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-
2	B	-

Connector No.	E5
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH20FW-CS12-M4-1V




Terminal No.	Color of Wire	Signal Name [Specification]
7	R	-
12	B/W	-

Connector No.	E6
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH08FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
39	P	-
40	L	-
41	B/Y	-

Connector No.	E9
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH16FW-NH

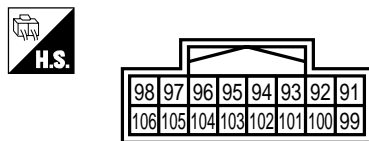

Terminal No.	Color of Wire	Signal Name [Specification]
91	O	-
92	R	-
93	V	-
94	G	-

Connector No.	E28
Connector Name	FRONT COMBINATION LAMP LH
Connector Type	RS08FB-PR



Terminal No.	Color of Wire	Signal Name [Specification]
4	B/P	-
8	R	-

Connector No.	E29
Connector Name	FRONT SIDE MARKER LAMP LH
Connector Type	RK02FBR-DGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	G	-
2	B/W	-

Connector No.	E58
Connector Name	FRONT COMBINATION LAMP RH
Connector Type	RS08FB-PR



Terminal No.	Color of Wire	Signal Name [Specification]
4	B/O	-
8	O	-


PARKING, LICENSE PLATE AND TAIL LAMPS

Connector No.	E63
Connector Name	FRONT SIDE MARKER LAMP RH
Connector Type	RK02FBR-DGY




Terminal No.	Color of Wire	Signal Name [Specification]
1	V	—
2	B	—

Connector No.	E103
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS16FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
9F	R	—

Connector No.	E104
Connector Name	WIRE TO WIRE
Connector Type	NS12MW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
1	L	—
6	P	—

Connector No.	E106
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
91	GR	—

Connector No.	M1
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS06FW-M2




Terminal No.	Color of Wire	Signal Name [Specification]
1A	V	—
7A	R	—

Connector No.	M3
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
12C	W	—

Connector No.	M5
Connector Name	WIRE TO WIRE
Connector Type	TH40MW-CS15



Terminal No.	Color of Wire	Signal Name [Specification]
15	B	—
38	V	—


Connector No.	M6
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
91	GR	—


PARKING, LICENSE PLATE AND TAIL LAMPS

Connector No.	M7
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
63	GR	-
69	P	-
70	L	-

Connector No.	M24
Connector Name	DATA LINK CONNECTOR
Connector Type	BD16FW




Terminal No.	Color of Wire	Signal Name [Specification]
6	L	-
14	P	-

Connector No.	M33
Connector Name	COMBINATION SWITCH
Connector Type	TH16FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
2	SB	OUTPUT 4
5	L	OUTPUT 3
7	V	INPUT 3
8	O	OUTPUT 5
9	Y	INPUT 2
10	R	INPUT 4
11	LG	INPUT 1
12	P	OUTPUT 1
13	BR	INPUT 5
14	G	OUTPUT 2

Connector No.	M53
Connector Name	COMBINATION METER
Connector Type	SAB40FW



Terminal No.	Color of Wire	Signal Name [Specification]
1	V	BATTERY POWER SUPPLY
2	W	IGNITION POWER SUPPLY
3	B	GROUND
4	B	ILL GND
5	B	GROUND
21	L	CAN-H
22	P	CAN-L

Connector No.	M60
Connector Name	KEY SLOT
Connector Type	TH12FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
1	G	BAT
7	B	GND
11	R	KEY SWITCH SIGNAL

Connector No.	M118
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	M03FB-LC




Terminal No.	Color of Wire	Signal Name [Specification]
1	GR	BAT (F/L)

Connector No.	M119
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	NS16FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
11	R	BAT (FUSE)
13	B	GND


Connector No.	M122
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FB-NH



Terminal No.	Color of Wire	Signal Name [Specification]
87	BR	COMBI SW INPUT 5
88	V	COMBI SW INPUT 3
89	BR	PUSH SW
90	P	CAN-L
91	L	CAN-H
100	W	PASSENGER DOOR REQUEST SW
101	V	DRIVER DOOR REQUEST SW
107	LG	COMBI SW INPUT 1
108	R	COMBI SW INPUT 4
109	Y	COMBI SW INPUT 2


PARKING, LICENSE PLATE AND TAIL LAMPS

Connector No.	M123
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FG-NH



Terminal No.	Color of Wire	Signal Name [Specification]
121	R	KEY SLOT SW
142	O	COMBI SW OUTPUT 5
143	P	COMBI SW OUTPUT 1
144	G	COMBI SW OUTPUT 2
145	L	COMBI SW OUTPUT 3
146	SB	COMBI SW OUTPUT 4
150	GR	DRIVER DOOR SW

Connector No.	M124
Connector Name	WIRE TO WIRE
Connector Type	TH40MW-CS15

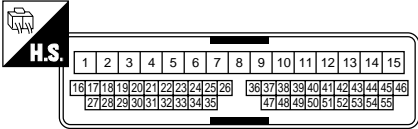

Terminal No.	Color of Wire	Signal Name [Specification]
15	B	-
38	W	-

Connector No.	M131
Connector Name	PUSH-BUTTON IGNITION SWITCH
Connector Type	TK08FBR



Terminal No.	Color of Wire	Signal Name [Specification]
1	B	-
4	BR	-