



IGNITION POWER SUPPLY FUSE No. 3

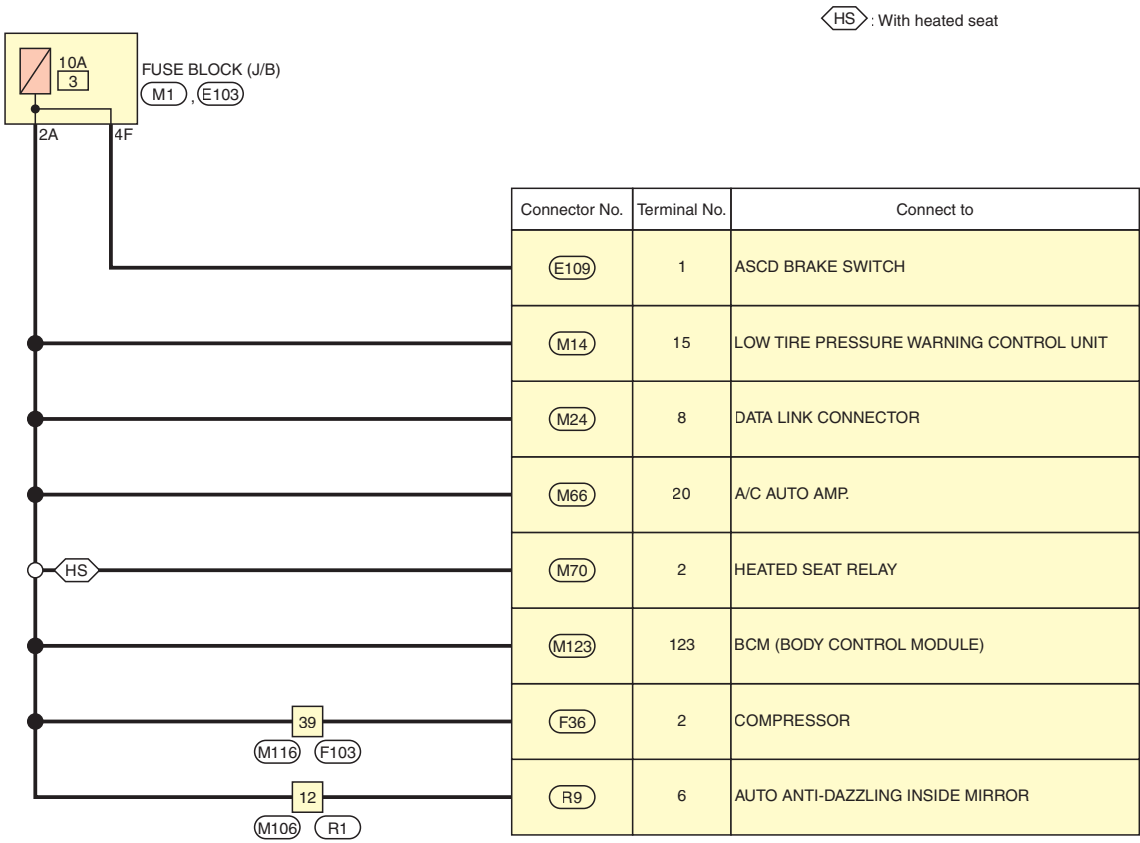

# IGNITION POWER SUPPLY FUSE No. 3

Connector No.	E103
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS16FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
4F	G	-

Connector No.	E109
Connector Name	ASCD BRAKE SWITCH
Connector Type	M02FBR-LC



Terminal No.	Color of Wire	Signal Name [Specification]
1	G	-

Connector No.	F36
Connector Name	COMPRESSOR
Connector Type	RK02FGY




Terminal No.	Color of Wire	Signal Name [Specification]
2	Y	ECV POWER SUPPLY

Connector No.	F103
Connector Name	WIRE TO WIRE
Connector Type	TK36FW-NS10




Terminal No.	Color of Wire	Signal Name [Specification]
39	Y	-

Connector No.	M1
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS06FW-M2




Terminal No.	Color of Wire	Signal Name [Specification]
2A	G	-

Connector No.	M14
Connector Name	LOW TIRE PRESSURE WARNING CONTROL UNIT
Connector Type	TH32FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
15	G	IGN

Connector No.	M24
Connector Name	DATA LINK CONNECTOR
Connector Type	BD16FW



Terminal No.	Color of Wire	Signal Name [Specification]
8	G	-


Connector No.	M66
Connector Name	A/C AUTO AMP.
Connector Type	SAB40FW



Terminal No.	Color of Wire	Signal Name [Specification]
20	G	IGNITION POWER SUPPLY


### IGNITION POWER SUPPLY FUSE No. 3

Connector No.	M70
Connector Name	HEATED SEAT RELAY
Connector Type	MS02FL-M2-LC



Terminal No.	Color of Wire	Signal Name [Specification]
2	G	—

Connector No.	M106
Connector Name	WIRE TO WIRE
Connector Type	TH12MW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
12	GR	—

Connector No.	M116
Connector Name	WIRE TO WIRE
Connector Type	TK36MW-NS10




Terminal No.	Color of Wire	Signal Name [Specification]
39	V	—

Connector No.	M123
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FG-NH




Terminal No.	Color of Wire	Signal Name [Specification]
123	BR	IGN F/B

Connector No.	R1
Connector Name	WIRE TO WIRE
Connector Type	TH12FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
12	B/R	—

Connector No.	R9
Connector Name	AUTO ANTI-DAZZLING INSIDE MIRROR
Connector Type	TH10FB-NH



Terminal No.	Color of Wire	Signal Name [Specification]
6	B/R	IGN