




## INTERIOR ROOM LAMP CONTROL

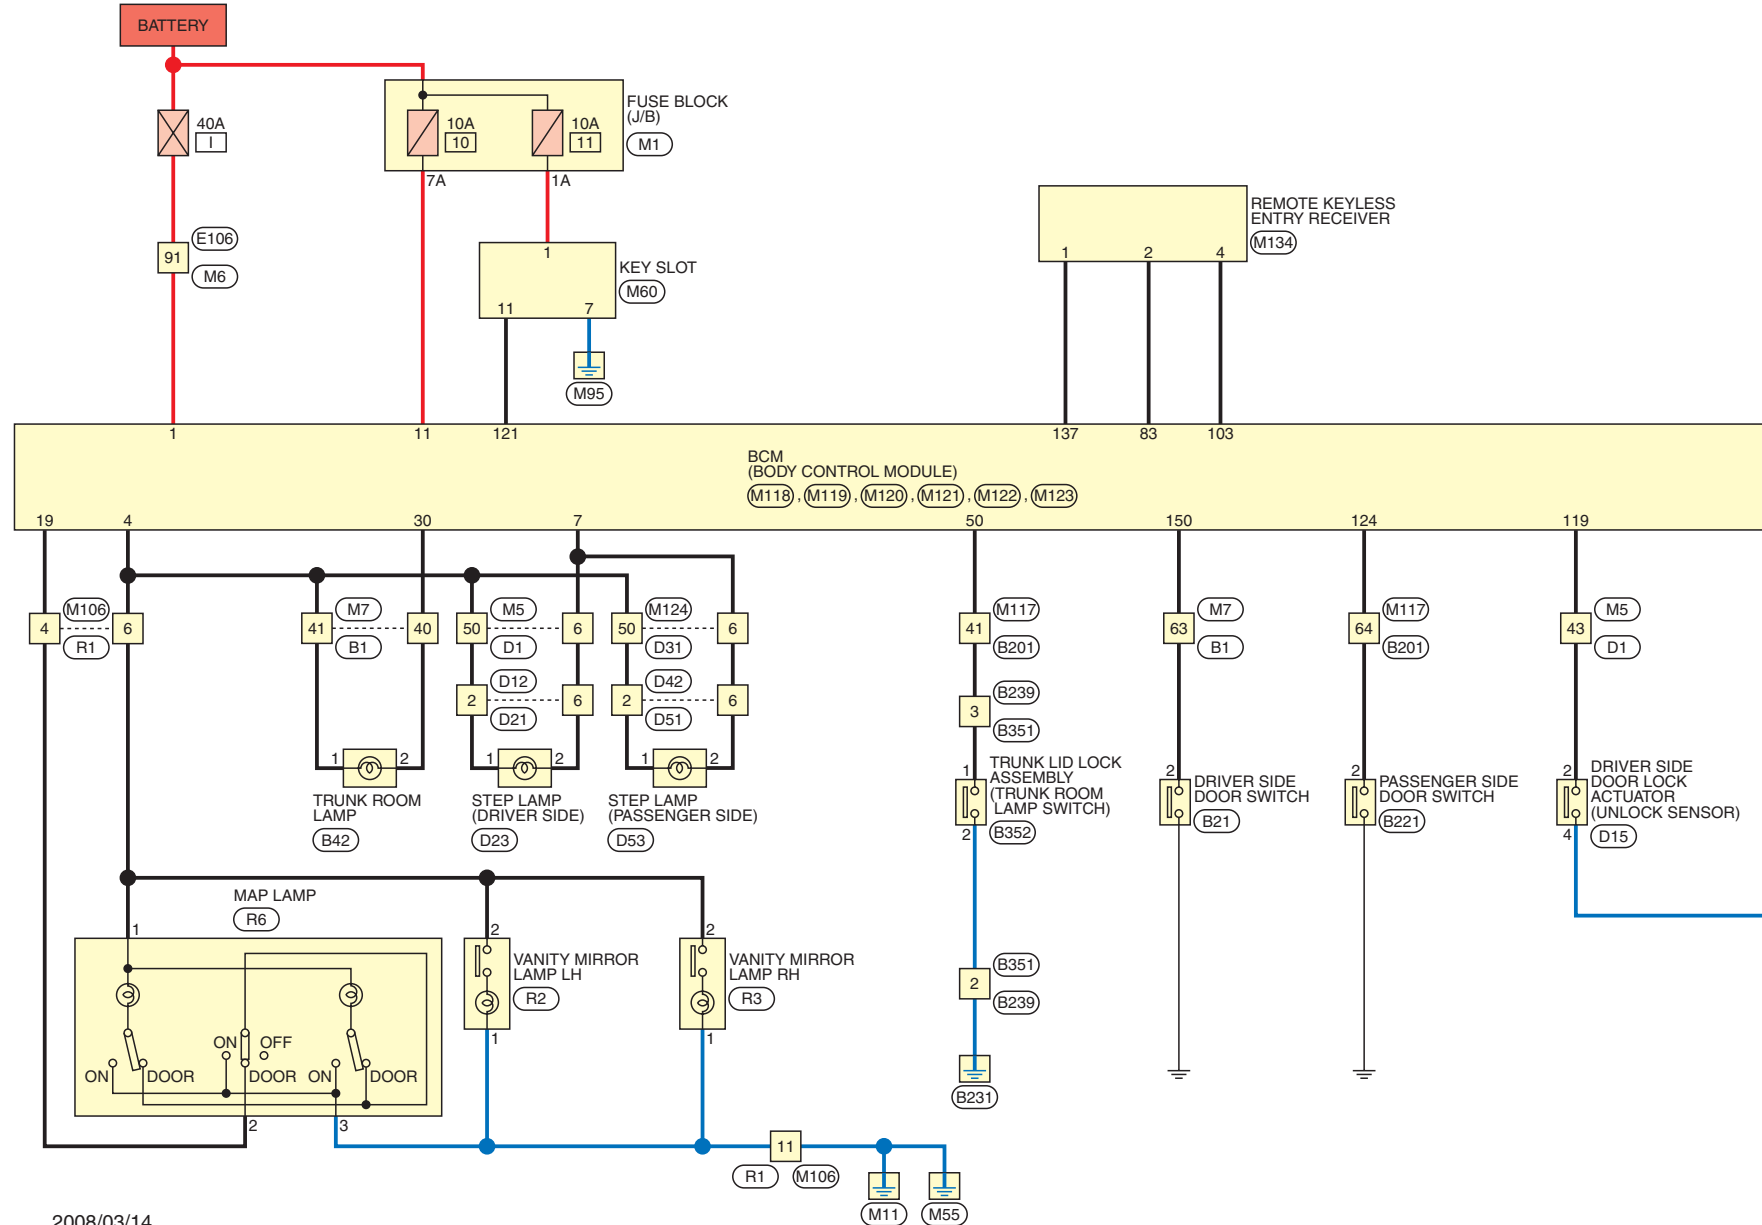

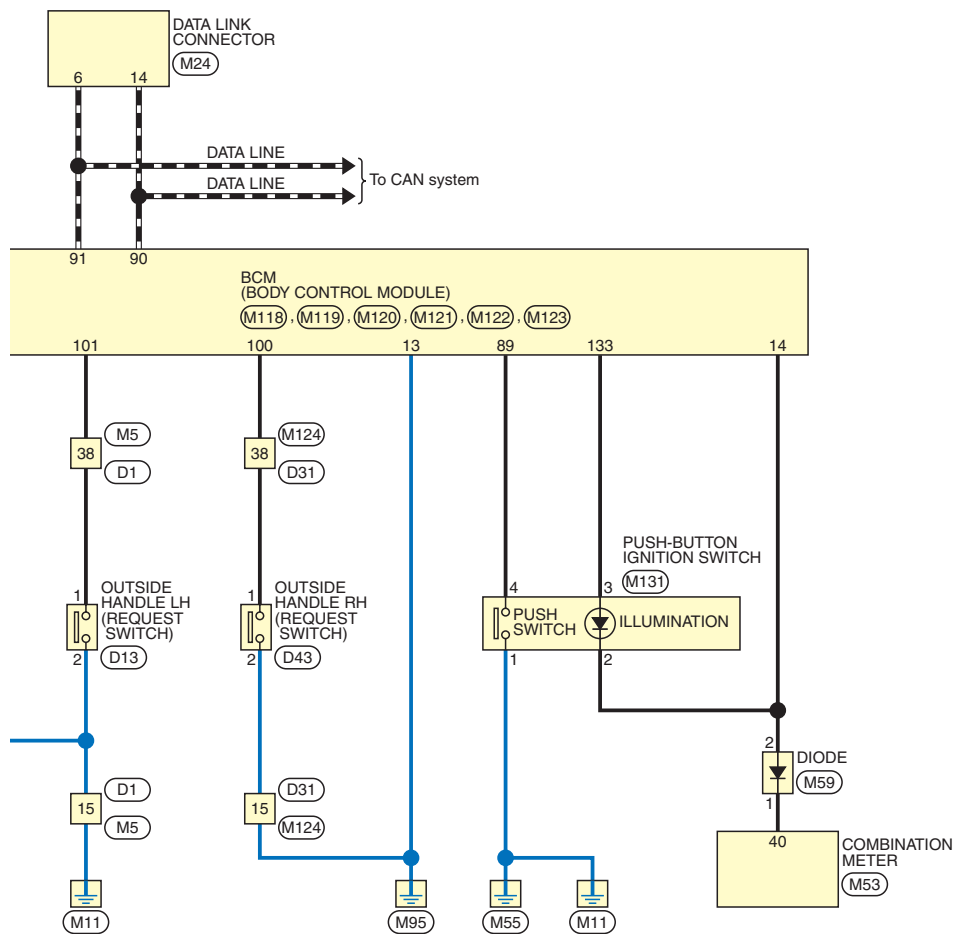


## INTERIOR ROOM LAMP CONTROL

Connector No.	B1
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
40	LG	-
41	Y	-
63	LG	-

Connector No.	B21
Connector Name	DRIVER SIDE DOOR SWITCH
Connector Type	A03FW




Terminal No.	Color of Wire	Signal Name [Specification]
2	LG	-

Connector No.	B42
Connector Name	TRUNK ROOM LAMP
Connector Type	S02FW



Terminal No.	Color of Wire	Signal Name [Specification]
1	Y	-
2	LG	-

Connector No.	B201
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
41	GR	-
64	GR	-

Connector No.	B221
Connector Name	PASSENGER SIDE DOOR SWITCH
Connector Type	A03FW



Terminal No.	Color of Wire	Signal Name [Specification]
2	GR	-

Connector No.	B239
Connector Name	WIRE TO WIRE
Connector Type	TH04FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
2	B	-
3	GR	-

Connector No.	B351
Connector Name	WIRE TO WIRE
Connector Type	TH04MW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
2	B	-
3	GR	-


Connector No.	B352
Connector Name	TRUNK LID LOCK ASSEMBLY
Connector Type	TB03FW-1V



Terminal No.	Color of Wire	Signal Name [Specification]
1	GR	-
2	B	-


## INTERIOR ROOM LAMP CONTROL

Connector No.	D1
Connector Name	WIRE TO WIRE
Connector Type	TH40FW-CS15

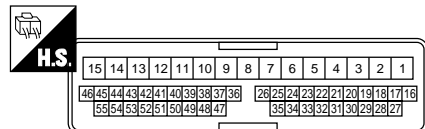

Terminal No.	Color of Wire	Signal Name [Specification]
6	Y	-
15	B	-
38	W	-
43	SB	-
50	R	-

Connector No.	D12
Connector Name	WIRE TO WIRE
Connector Type	TH08FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
2	R	-
6	Y	-

Connector No.	D13
Connector Name	OUTSIDE HANDLE LH (REQUEST SWITCH)
Connector Type	RK02MGY




Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-
2	B	-

Connector No.	D15
Connector Name	DRIVER SIDE DOOR LOCK ACTUATOR
Connector Type	RS04FGY-PR



Terminal No.	Color of Wire	Signal Name [Specification]
2	SB	-
4	B	-

Connector No.	D21
Connector Name	WIRE TO WIRE
Connector Type	TH08MW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
2	R	-
6	Y	-

Connector No.	D23
Connector Name	STEP LAMP (DRIVER SIDE)
Connector Type	C02FW




Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-
2	Y	-

Connector No.	D31
Connector Name	WIRE TO WIRE
Connector Type	TH40FW-CS15

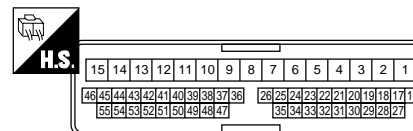

Terminal No.	Color of Wire	Signal Name [Specification]
6	Y	-
15	B	-
38	W	-
50	R	-

Connector No.	D42
Connector Name	WIRE TO WIRE
Connector Type	TH08FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
2	R	-
6	Y	-


## INTERIOR ROOM LAMP CONTROL

Connector No.	D43
Connector Name	OUTSIDE HANDLE RH (REQUEST SWITCH)
Connector Type	RK02MGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	—
2	B	—

Connector No.	D51
Connector Name	WIRE TO WIRE
Connector Type	TH08MW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
2	R	—
6	Y	—

Connector No.	D53
Connector Name	STEP LAMP (PASSENGER SIDE)
Connector Type	C02FW




Terminal No.	Color of Wire	Signal Name [Specification]
1	R	—
2	Y	—

Connector No.	E106
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
91	GR	—

Connector No.	M1
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS06FW-M2




Terminal No.	Color of Wire	Signal Name [Specification]
1A	V	—
7A	R	—

Connector No.	M5
Connector Name	WIRE TO WIRE
Connector Type	TH40MW-CS15




Terminal No.	Color of Wire	Signal Name [Specification]
6	Y	—
15	B	—
38	V	—
43	SB	—
50	R	—

Connector No.	M6
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
91	GR	—


Connector No.	M7
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
40	O	—
41	R	—
63	GR	—


## INTERIOR ROOM LAMP CONTROL

Connector No.	M24
Connector Name	DATA LINK CONNECTOR
Connector Type	BD16FW



Terminal No.	Color of Wire	Signal Name [Specification]
6	L	—
14	P	—

Connector No.	M53
Connector Name	COMBINATION METER
Connector Type	SAB40FW




Terminal No.	Color of Wire	Signal Name [Specification]
40	V	ILLUMINATION CONTROL

Connector No.	M59
Connector Name	DIODE
Connector Type	24335_C9900




Terminal No.	Color of Wire	Signal Name [Specification]
1	V	—
2	P	—

Connector No.	M60
Connector Name	KEY SLOT
Connector Type	TH12FW-NH




Terminal No.	Color of Wire	Signal Name [Specification]
1	G	BAT
7	B	GND
11	R	KEY SWITCH SIGNAL

Connector No.	M106
Connector Name	WIRE TO WIRE
Connector Type	TH12MW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
4	V	—
6	R	—
11	B	—

Connector No.	M117
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
41	R	—
64	LG	—

Connector No.	M118
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	M03FB-LC



Terminal No.	Color of Wire	Signal Name [Specification]
1	GR	BAT (F/L)


Connector No.	M119
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	NS16FW-CS



Terminal No.	Color of Wire	Signal Name [Specification]
4	R	INTERIOR ROOM LAMP POWER SUPPLY
7	Y	STEP LAMP
11	R	BAT (FUSE)
13	B	GND
14	P	PUSH-BUTTON IGNITION SW ILL GND
19	V	ROOM LAMP TIMER CONTROL


## INTERIOR ROOM LAMP CONTROL

Connector No.	M120
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	NS12FW-CS




Terminal No.	Color of Wire	Signal Name [Specification]
30	O	TRUNK ROOM LAMP OUTPUT

Connector No.	M121
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FGY-NH



Terminal No.	Color of Wire	Signal Name [Specification]
50	R	TRUNK ROOM LAMP SW

Connector No.	M122
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FB-NH



Terminal No.	Color of Wire	Signal Name [Specification]
83	Y	KEYLESS ENTRY RECEIVER COMM
89	BR	PUSH SW
90	P	CAN-L
91	L	CAN-H
100	W	PASSENGER DOOR REQUEST SW
101	V	DRIVER DOOR REQUEST SW
103	LG	KEYLESS ENTRY RECEIVER POWER SUPPLY

Connector No.	M123
Connector Name	BCM (BODY CONTROL MODULE)
Connector Type	TH40FG-NH




Terminal No.	Color of Wire	Signal Name [Specification]
119	SB	DR DOOR UNLOCK SENSOR
121	R	KEY SLOT SW
124	LG	PASSENGER DOOR SW
133	W	PUSH-BUTTON IGNITION SW ILL POWER
137	L	RECEIVER GND
150	GR	DRIVER DOOR SW

Connector No.	M124
Connector Name	WIRE TO WIRE
Connector Type	TH40MW-CS15




Terminal No.	Color of Wire	Signal Name [Specification]
6	Y	-
15	B	-
38	W	-
50	R	-

Connector No.	M131
Connector Name	PUSH-BUTTON IGNITION SWITCH
Connector Type	TK08FBR




Terminal No.	Color of Wire	Signal Name [Specification]
1	B	-
2	P	-
3	W	-
4	BR	-

Connector No.	M134
Connector Name	REMOTE KEYLESS ENTRY RECEIVER
Connector Type	JAB04FB



Terminal No.	Color of Wire	Signal Name [Specification]
1	L	GND
2	Y	SIGNAL OUTPUT
4	LG	BATTERY

Connector No.	R1
Connector Name	WIRE TO WIRE
Connector Type	TH12FW-NH



Terminal No.	Color of Wire	Signal Name [Specification]
4	V	-
6	R	-
11	B	-

INTERIOR ROOM LAMP CONTROL

Connector No.	R2
Connector Name	VANITY MIRROR LAMP LH
Connector Type	MCA02FW




Terminal No.	Color of Wire	Signal Name [Specification]
1	B	-
2	R	-

Connector No.	R3
Connector Name	VANITY MIRROR LAMP RH
Connector Type	MCA02FW



Terminal No.	Color of Wire	Signal Name [Specification]
1	B	-
2	R	-

Connector No.	R6
Connector Name	MAP LAMP
Connector Type	TK06FGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-
2	V	-
3	B	-