



BATTERY POWER SUPPLY FUSE No. 50

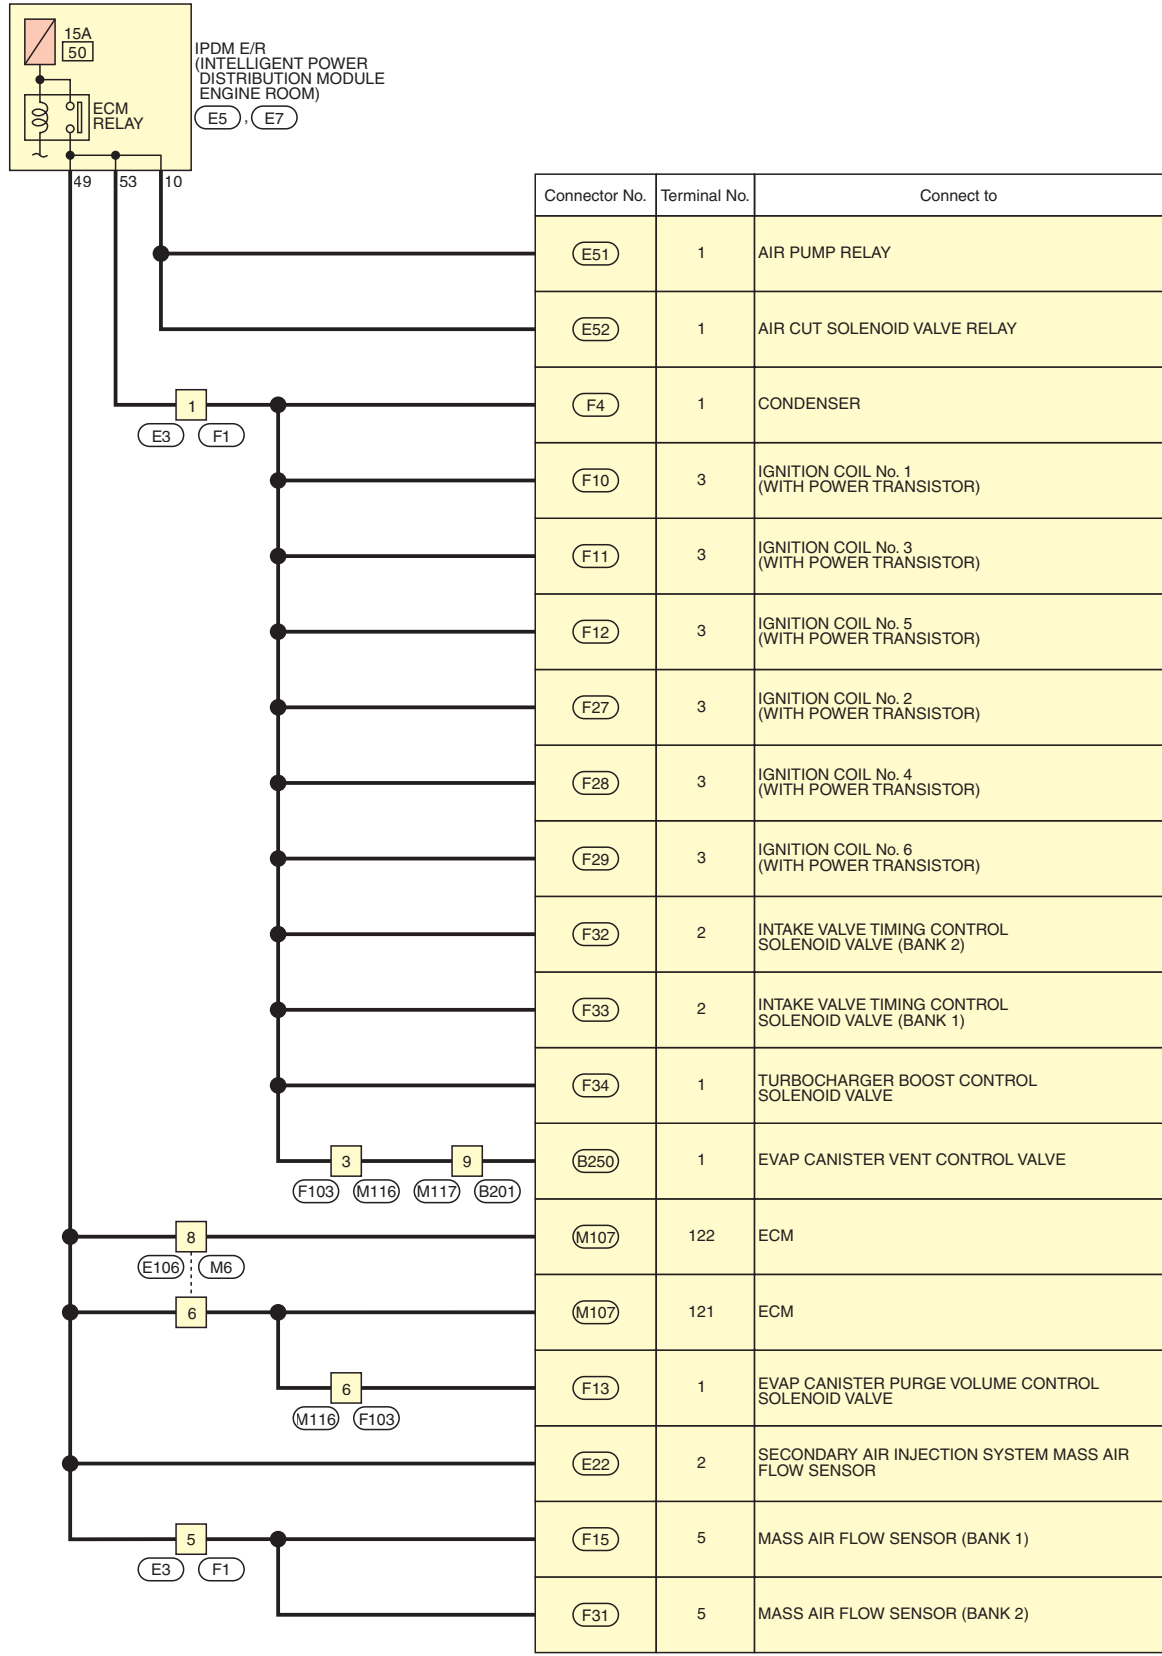

BATTERY POWER SUPPLY FUSE No. 50

Connector No.	B201
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
9	W	-

Connector No.	B250
Connector Name	EVAP CANISTER VENT CONTROL VALVE
Connector Type	E02FB-RS




Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-

Connector No.	E3
Connector Name	WIRE TO WIRE
Connector Type	RS08FB-PR




Terminal No.	Color of Wire	Signal Name [Specification]
1	SB	-
5	P	-

Connector No.	E5
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH20FW-CS12-M4-1V



Terminal No.	Color of Wire	Signal Name [Specification]
10	W	-

Connector No.	E7
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH20FW-CS12-M4




Terminal No.	Color of Wire	Signal Name [Specification]
49	P	-
53	SB	-

Connector No.	E22
Connector Name	SECONDARY AIR INJECTION SYSTEM MASS AIR FLOW SENSOR
Connector Type	E04FBR-RS-LGY




Terminal No.	Color of Wire	Signal Name [Specification]
2	P	-

Connector No.	E51
Connector Name	AIR PUMP RELAY
Connector Type	24347.9F900



Terminal No.	Color of Wire	Signal Name [Specification]
1	BR	-


Connector No.	E52
Connector Name	AIR CUT SOLENOID VALVE RELAY
Connector Type	MS02FL-M2



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-


BATTERY POWER SUPPLY FUSE No. 50

Connector No.	E106
Connector Name	WIRE TO WIRE
Connector Type	TH80FW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
6	P	-
8	P	-

Connector No.	F1
Connector Name	WIRE TO WIRE
Connector Type	RS08MB-PR



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-
5	R	-

Connector No.	F4
Connector Name	CONDENSER
Connector Type	M02FW-LC




Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-

Connector No.	F10
Connector Name	IGNITION COIL No. 1 (WITH POWER TRANSISTOR)
Connector Type	E03FGY-RS



Terminal No.	Color of Wire	Signal Name [Specification]
3	W	-

Connector No.	F11
Connector Name	IGNITION COIL No. 3 (WITH POWER TRANSISTOR)
Connector Type	E03FGY-RS



Terminal No.	Color of Wire	Signal Name [Specification]
3	W	-

Connector No.	F12
Connector Name	IGNITION COIL No. 5 (WITH POWER TRANSISTOR)
Connector Type	E03FGY-RS




Terminal No.	Color of Wire	Signal Name [Specification]
3	W	-

Connector No.	F13
Connector Name	EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE
Connector Type	E02FL-RS-LGY



Terminal No.	Color of Wire	Signal Name [Specification]
1	O	-

Connector No.	F15
Connector Name	MASS AIR FLOW SENSOR (BANK 1)
Connector Type	RH06FB



Terminal No.	Color of Wire	Signal Name [Specification]
5	R	-

BATTERY POWER SUPPLY FUSE No. 50

Connector No.	F27
Connector Name	IGNITION COIL No. 2 (WITH POWER TRANSISTOR)
Connector Type	E03FGY-RS



Terminal No.	Color of Wire	Signal Name [Specification]
3	W	-

Connector No.	F28
Connector Name	IGNITION COIL No. 4 (WITH POWER TRANSISTOR)
Connector Type	E03FGY-RS



Terminal No.	Color of Wire	Signal Name [Specification]
3	W	-

Connector No.	F29
Connector Name	IGNITION COIL No. 6 (WITH POWER TRANSISTOR)
Connector Type	E03FGY-RS



Terminal No.	Color of Wire	Signal Name [Specification]
3	W	-

Connector No.	F31
Connector Name	MASS AIR FLOW SENSOR (BANK 2)
Connector Type	RH06FB



Terminal No.	Color of Wire	Signal Name [Specification]
5	R	-

Connector No.	F32
Connector Name	INTAKE VALVE TIMING CONTROL SOLENOID VALVE (BANK 2)
Connector Type	E02FG-RS-LGY




Terminal No.	Color of Wire	Signal Name [Specification]
2	W	-

Connector No.	F33
Connector Name	INTAKE VALVE TIMING CONTROL SOLENOID VALVE (BANK 1)
Connector Type	E02FG-RS-LGY




Terminal No.	Color of Wire	Signal Name [Specification]
2	W	-

Connector No.	F34
Connector Name	TURBOCHARGER BOOST CONTROL SOLENOID VALVE
Connector Type	BS02FB-AHY-S



Terminal No.	Color of Wire	Signal Name [Specification]
1	W	-


Connector No.	F103
Connector Name	WIRE TO WIRE
Connector Type	TK36FW-NS10



Terminal No.	Color of Wire	Signal Name [Specification]
3	W	-
6	O	-


BATTERY POWER SUPPLY FUSE No. 50

Connector No.	M6
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4




Terminal No.	Color of Wire	Signal Name [Specification]
6	P	—
8	V	—

Connector No.	M107
Connector Name	ECM
Connector Type	RH24FGY-RZ8-R-LH-Z




Terminal No.	Color of Wire	Signal Name [Specification]
121	P	VBR
122	V	VBR

Connector No.	M116
Connector Name	WIRE TO WIRE
Connector Type	TK36MW-NS10



Terminal No.	Color of Wire	Signal Name [Specification]
3	W	—
6	P	—

Connector No.	M117
Connector Name	WIRE TO WIRE
Connector Type	TH80MW-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
9	W	—